



Website



Facebook



Youtube



Instagram

FENIXLIGHT LIMITED

Tel: +86-755-29631163/83/93 Fax: +86-755-29631181

Email: info@fenixlight.com www.fenixlight.com

Address: 8/F, 2nd Building, DongFangMing Industrial Center,
33rd District, Bao'an, Shenzhen 518133, China

Copy Right Jan. 2018 V1.0

All Rights Reserved By Fenixlight Limited

FENIX
LIGHTING FOR EXTREMES

2018
PRODUCT CATALOG



TO BE THE BEST OUTDOOR SPORT LIGHTING BRAND IN THE WORLD

Fenix is a leading outdoor sport lighting brand as well as a China national high-tech enterprise, specializing in R&D, manufacturing and selling of outdoor sport lighting tools, including mid/high-end flashlights, headlamps, bicycle lights, camping lanterns as well as accessories. Fenix products are now being sold in more than 100 countries around the world.

Concentrating on innovative lighting technology and solutions, Fenix constantly develops LED lighting tools of high performance and high reliability, satisfying customers' pursuit of versatile illumination tools of high quality through exquisite craftsmanship. Fenix's products are widely used in the fields of outdoor sport, industry, law enforcement, military, edc (everyday carry), etc. As every product is released with excellent performance and reliable quality, Fenix has become known worldwide as a premium LED lighting brand.

Committed to the mission of innovating outdoor sport lighting and to make users' experience as pleasant as possible, Fenix aims to be the best outdoor sport lighting brand in the world.

BRAND ORIGIN

As the great Chinese thinker Lu Xun said: "Improvement roots from dissatisfaction". The establishment of Fenix also roots from dissatisfaction. A group of young men, passionate about high quality illumination tools but unsatisfied with lighting products at that time, set out to make perfect flashlights, endeavoring to make the best flashlights in the world. Adhering to the concept of "providing excellent products to customers through innovative design", Fenix has grown up to become a world-renowned outdoor sport lighting brand!

BRAND CONNOTATION

The word Fenix roots from the English word phoenix [fi:niks], which in the Chinese translation means "phoenix" or "perfect thing", and the phoenix figure represents luck, blessedness and perfection in the Chinese culture.

FENIX’S AWARDS

- Flashlight of 2005
- National High-Tech Enterprise
- The “Best in Show” Award in 2011 Outdoor Retailer Trade Show
- The LD20 got the title: “Best LED Flashlight”
- 2011 – 2013 “Zunlv Award” during annual election of Chinese outdoor industry awards
- The “Best of Show” Award – AFTA Trade Show 2013
- PD12 – ISPO “Award Winner” 2013/2014
- Named: The Best Cycling Gear of 2013 by Outside magazine
- CL20 – ISPO “Award Winner” 2015/2016
- “Editor’s Choice” award by Outdoor Life magazine
- Single product “Brand of the Year” 2013
- BT20 – ISPO Asia Products “Gold Winner” Award 2012/2013
- Silver Prize in Asia Outdoor Industry Awards
- Named “Best Bargain” by Backpacker magazine
- Silver Prize in Chinese Outdoor Gear Award
- Named as one of the “Top 10 Travel Gadgets under \$50” by New York Times newspaper
- BC30R – Silver Award in Asia Outdoor Industry Awards; ISPO Asia Products “Gold Winner” Award 2015/2016
- CL25R—ISPO(Asia) Award Gold Winner
- HL10 2016—ISPO Global Product Winner
- TK72R won the Red Dot Award: Product Design 2017



TK series	Tough and powerful flashlights	7
PD series	Portable and high-intensity flashlights	22
LD series	Professional outdoor flashlights	29
E series	Outdoor flashlights	35
RC/UC series	High-performance rechargeable flashlights	49
FD series	Adjustable focus lights	43
SD series	Underwater sport lights	57
MC series	Angle lights	41
HP series	High-performance separated headlamps	61
HM series	High-performance integrated headlamps	65
HL series	Lightweight outdoor headlamps	69
Bicycle light		75
Camping lantern		83
Accessories		91

HIGH PERFORMANCE

Fenix utilizes the most advanced, world-class LED's with a lifespan of 50,000 hours, leading the trend in the LED industry and staying up to date with development in the LED industry. Owing to the accumulative experience of the diligent R&D team, Fenix is able to make the most of high photoelectric conversion efficiency, to have limited electric energy transformed into light energy, plus the choice of professional ultra-clear glass lens with anti-reflective coating, so that each spectral LED is effectively emitted. Additionally, outstanding constant current circuitry highlights Fenix's products, meaning a constant bright light with no flickering as the batteries discharge.

Digital regulation, constant brightness

Constant current circuitry

EXQUISITE WORKMANSHIP

The application of advanced LED's and optical devices provide the foundation of manufacturing high-performance products. The critical fact that Fenix is greatly favored comes from manufacturing excellence and quality requirements. Fenix insists on aircraft-grade aluminum material to be produced by computerized numerical control (CNC) machinery, and premium Type III hard-anodized anti-abrasive finishing ensures Fenix products are sturdy and durable. Furthermore, exterior structure and surface processing is not the only and end result. Fenix commits to excellence also in circuit design, an independent yet advanced SMT product line, CNC product line and oxygen installation, which all ensure that every product is refined internally as well as externally.

HIGH RELIABILITY

High-efficiency optical system

Fenix abides by the ISO9001 quality control system, which strictly supervises material selection, product manufacturing and quality inspection. As a member of PLATO, Fenix always sticks with professional inspection equipment and conducts every test in accordance with ANSI standards. Reliable structure design empowers Fenix lighting tools with great heat dissipation, extra strong dust resistance and waterproof capability to face various environments. Most of Fenix's products are waterproof to IPX8 standard; the diving flashlight is even waterproof to 100 meters deep.


Utilizing the latest LED

PROMINENT OPTICAL SYSTEM

Sparing no efforts in meeting different environmental conditions, Fenix focuses on light color and light spot design, thus making every Fenix product balanced in terms of output, distance and beam angle, and reliable enough for various demanding applications. Fenix continues searching for a breakthrough - some products have orange-peel reflectors for ideal lighting efficacy; some have dual light sources to allow for spot- and floodlight needs; some even have composite reflectors for choosing multiple light colors. Fenix bicycle lights feature Dual Distance Beam System which is greatly favored by users and has received major industry awards.

Waterproof to IPX8 standard

Aircraft-grade aluminum

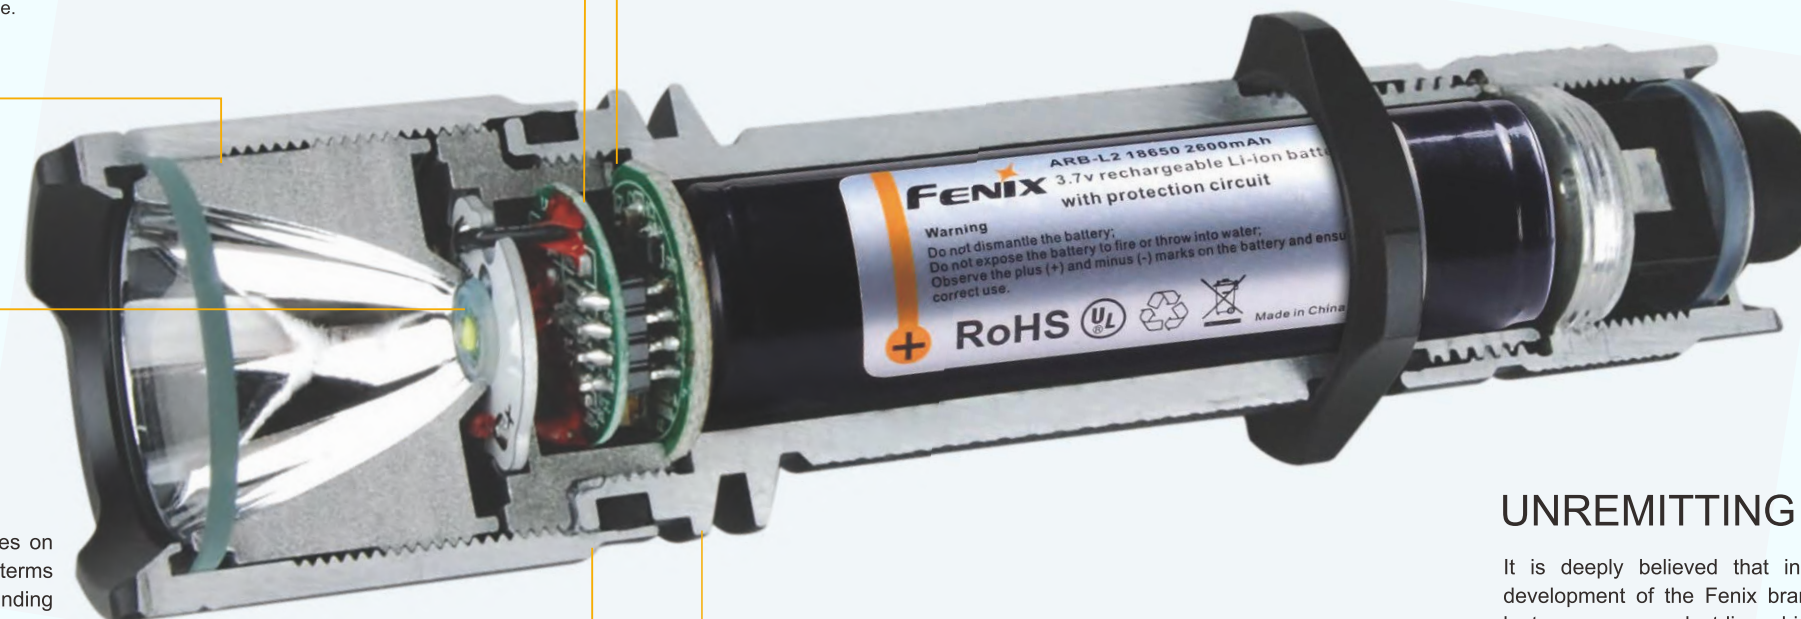

UNREMITTING INNOVATION

It is deeply believed that innovation is the source of the ongoing progress and development of the Fenix brand. On the one hand, Fenix has exploited the camping lantern, a new product line which enriches Fenix as an all-around outdoor lighting brand. On the other hand, Fenix is committed to developing and introducing new techniques, dedicated to pleasing illumination experience and user-friendliness. The four-proofing headlamps even lead the trend in high-performance headlamps, and the characteristic cold-resistant camping lantern act tough in harsh environments.

ADVANCED LIGHTING TECHNOLOGY

HIKING

For a night of hiking, lightweight lighting tools are usually sufficient for common users. A long battery life and up close illumination are bonus points. For team leaders though, this kind of flashlight is not suitable. For them lighting tools with ultra-high output and far-reaching beam are more important than long duration, because they always have to plan and “read” the road ahead.

Some recommended Fenix models: PD35,LD22,LD12,E20,E12,UC30,RC09,HL30,HL26R,HL23,HL16,HL10

CAMPING

Generally a high output lighting tool is not required for camping activities. A useful light would be one with a flood beam capable of lighting a large area for a long time, thus a lantern that can run all night without the need of a battery replacement would be considered ideal, without being too expensive.

Some recommended Fenix models: CL30R,CL25R,CL20R,CL09,CL05,CP30R,TK47UE

CLIMBING

When climbing, a lighting tool with a soft flood beam is really helpful, especially when rock climbing or in snowy environments. Better color rendering makes for better user experience. For higher altitude climbing a cold-resistant lighting tool is particularly important – not only for better reliability, but also to maintain a longer duration of light.

Some recommended Fenix models: HL60R,HL55,HM50R,HL40R,HL32R,HL30,HP30R,HP25R,HP15UE

RUNNING

For long distance cross-country running, runners prefer a lightweight headlamp with a long output duration which gives a good flood beam immediately around and in front, but in exceptional circumstances higher output lights with caution indication are also necessary. For those who enjoy leisurely urban night running, safety is of utmost importance, so choose a reliable tool as companion.

Some recommended Fenix models: HL30,HL26R,HL15,HL12R,HL10,HL05,HM50R

CYCLING

High speed cross-country cycling requires a bicycle light with high output, combined with long-distance visibility and up close illumination, while at the same time considering long duration. For road riding with better and brighter light conditions, an economical bicycle light with fast and convenient dismounting are better than those with a higher output.

Some recommended Fenix models: BC30R,BC30,BC21R,BT30R

HUNTING

A flashlight used for hunting should have a high output with a spotlight to ensure optimal beam distance, but because the light will be used only occasionally while hunting, a long runtime is not a huge requirement. Generally a hunting flashlight will need accessories that can absorb the recoil of a gun. Lights preferred for hunting are those that are equipped with red lights, or where a red filter can be added.

Some recommended Fenix models: TK32,TK25R&B,TK25IR,TK16,TK15UE,FD41,FD30,PD35TAC

FISHING

While fishing, lighting tools will also be used only occasionally, thus long duration is not important. Fish are usually attracted by blue light, so lighting tools with blue lights are made for fishing.

Some recommended Fenix models: HP25R,HP15UE,HL60R,HL30,HL12R,TK25 R&B

SEARCHING

Lighting tools for searching will demand high output and ultra-long beam distance, but these lighting tools are also burdened with larger volume and larger weight. Both these factors though, are secondary to the high performance of these lighting tools

Some recommended Fenix models: RC40,UC52,TK75,TK72R,TK65R,TK47,TK47UE,TK35,TK32,FD65,HP30R,HP25R

LIGHTING FOR EXTREMES

EMERGENCY RESCUE

Nowadays, people (personal and families) pay more attention to emergency lighting tools, let alone those professional security organizations that need high-performance lighting tools. During emergency rescue operations, readily accessible batteries like AA and CR123A really matter, so lighting tools compatible with these kinds of batteries are greatly preferred.

Some recommended Fenix models: LD41,LD22,FD45,FD20,E20,PD35,PD25,RC20,UC35,RC09,SE10

LAW ENFORCEMENT/ TACTICAL

First and foremost, high-output spotlights and far-reaching beams are indispensable features for flashlights used for law enforcement and tactical operations. Besides that, certain unique tactical features cannot be neglected, such as tactical switches, strike crown bezels, grip rings and strobe functions. Compatibility with other accessories used for tactical applications, like tactical flashlight rings, remote pressure switches and traffic wands, is also very important.

Some recommended Fenix models: TK25R&B,TK25IR,TK20R,TK16,TK15UE,TK09,PD35TAC,PD32,UC35,RC20,FD30

SAFETY

For insuring your safety, the lighting tools you use should have high output, while some tactical requirements are a strike bezel and strobe function. Furthermore, this kind of lighting tool should be highly reliable in resisting dust, water and shocks, and should be tough enough to confront emergency conditions.

Some recommended Fenix models: TK65R,TK47,TK25IR,TK20R,TK16, TK15UE,RC20,UC35,PD35TAC

CAVING

A tough lighting tool plays a significant role in caving activities, while at the same time being versatile with regards to output selection, in that low output protects night vision, while high output is needed to deal with complex cave conditions. Combining spot- and floodlight enables far as well as wide visibility, which are essential for cave exploration. Additional features that are needed are long battery duration, high waterproof ability and shock resistance.

Some recommended Fenix models: HP30R,HP25R,HL60R,HL55,HM50R,HL40R,TK47UE,TK35UE,LD41,FD65

DIVING

Without doubt, a flashlight for diving needs to be totally waterproof, thereafter high reliability and high brightness. As for battery life, that should be sufficient to exceed the duration of the planned dive. What's more, this diving flashlight must provide user-friendly operation underwater. Weight and size in this case are not of great importance due to the buoyancy provided by water.

Some recommended Fenix models: SD11, SD20

INDUSTRIAL WORKPLACE

Rechargeable lighting products are usually warmly welcomed by industrial workers because of economic practicality. These rechargeable lights should feature multiple output selection and fast and convenient operation, while at the same time have high waterproofing capabilities, and be shock- and dust resistant. All these elements combined, react tough against the complex environments of industrial workplaces.

Some recommended Fenix models: SE10,RC20,RC09,UC30,FD20,HL60R,HL40R,HM50R,HP30R,HP25R,HP15UE

PHOTOGRAPHY

Convenience and portability are essential for photography, where it is sometimes necessary to have manmade light, e. g. during nighttime outdoor photography. A helpful lighting tool brings about the best photographic works. For these photographic activities, features that are essential are neutral white lights for better color rendering, multiple output choices, and the flexibility to adjust between spot- and floodlight, plus the option to add colored filter adapters when needed.

Some recommended Fenix models: LD75C,TK35UE,TK25RB,E35UE,UC30,FD65,SD11,HL12R

EDC

EDC (Everyday carry) as the name suggests, is designed to be carried with you all the time - to be a part of your daily life, thus this kind of lighting tool needs to be ultra-compact, and in critical emergency situations can help to save lives. Precise circuit design gives regulated low output with long lasting duration, and because a choice of output levels is not essential, two or three output selections should be sufficient. In cases of emergency, remember that this little buddy will always be by your side.

Some recommended Fenix models: E15,E12,E05,E01,UC02SS,UC02,UC01,LD12,LD09,RC09,RC05,HL10,HL05


A person is seen from behind, holding a flashlight that illuminates a rocky mountain peak and surrounding vegetation at night. The flashlight beam is bright and focused on the mountain. The sky is dark with some clouds. The person is wearing a dark jacket.

TK SERIES

Tough and powerful flashlights

Based on the design concept “(T)ank (K)ing of the battlefield, Fenix's TK series models enter with high output, extended reach, toughness and reliability, which not only satisfy your particular needs when hunting and searching, but is also an unmatched choice for policing, military activities and enforcing the law.

TK75 2018
5100 LUMENS
SUPER BRIGHT MULTIFUNCTIONAL
FLASHLIGHT

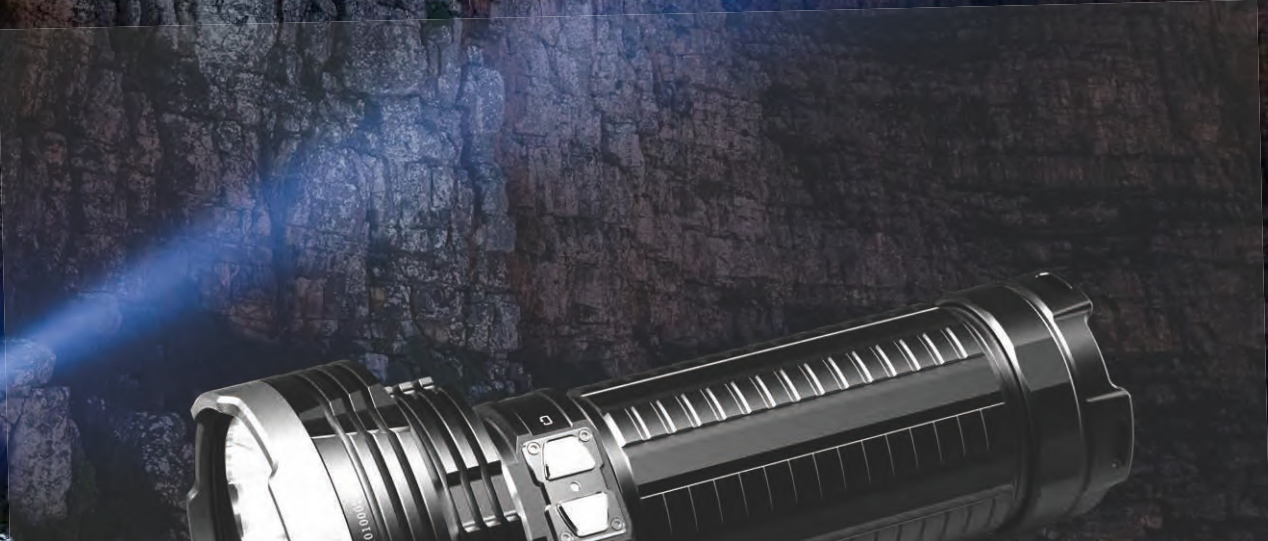

NEW

Battery: 4*18650
Size: 185mm Length x 52.5mm Body diameter x 87.5mm Head diameter
Weight: 575 grams (excluding batteries)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	5100 Lumens	2h 15min	850m
HIGH II	2000 Lumens	3h	517m
HIGH I	1000 Lumens	6h	367m
MED	450 Lumens	17h 45min	257m
LOW	150 Lumens	46h	147m
ECO	50 Lumens	95h	85m
STROBE	5100 Lumens	/	/
SOS	150 Lumens	/	/

5100 lumens

850m beam distance

Micro USB charging battery holder

Battery level indication

Tripod socket

Momentary on turbo

Momentary on strobe

IP68, underwater 2m

TK72R 9000 LUMENS
SUPER BRIGHT INTELLIGENT FLASHLIGHT



NEW

Battery: 7000mAh Li-ion battery pack
Size: 156mm Length x 59mm Body diameter x 50mm Head diameter
Weight: 412 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
HIGH	9000 lumens	50min	286m
LOW	100 lumens	50h	31m
STROBE	4000 lumens	/	/

OLED display

Micro USB charging

USB discharging

Inner waterproof charging port

7000mAh Li-ion battery pack

Three ways of switching on

Momentary on turbo

IP68, underwater 2m

TK65R 3200 LUMENS
RECHARGEABLE SECURITY FLASHLIGHT



NEW

11







Battery: 5,000mAh/7.2V Li-ion battery pack
Size: 270.5mm Length x 61.5mm Body diameter x 36.5mm Head diameter

Weight: 418 grams (excluding battery)



ANSI/PLATO FL1

MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	3200 Lumens	1h 45min	375m
HIGH	1000 Lumens	4h 55min	218m
MED	400 Lumens	13h 10min	138m
LOW	150 Lumens	35h 45min	83m
ECO	30 Lumens	113h	37m
STROBE	3200 Lumens	/	/
SOS	400 Lumens	/	/



Battery: 2*18650

Size: 266.2mm Length x 61.5mm Body diameter x 28.6mm Head diameter

Weight: 376 grams (excluding batteries)

ANSI/PLATO FL1

	MODE	OUTPUT	RUNTIME	DISTANCE
HEAD	TURBO	1300 Lumens	1h 50min	700m
	HIGH	400 Lumens	7h 15min	412m
	MED	100 Lumens	40h	214m
	LOW	10 Lumens	220h	73m
	STROBE	1300 Lumens	/	/
TAIL	WHITE LIGHT	30 Lumens	43h 30min	*8m
	RED LIGHT	1.5 Lumens	150h	/
	RED FLASH	1.5 Lumens	/	/
	RED SOS	1.5 Lumens	/	/

*Tail light with a wide-range 8m beam diameter

TK47 1300 LUMENS
DUAL-PURPOSE LONG-RANGE FLASHLIGHT



12

TK47

ULTIMATE EDITION

3200 LUMENES

DUAL-PURPOSE HIGH-PERFORMANCE FLASHLIGHT



Battery: 2*18650
Size: 266.2mm Length x 61.5mm Body diameter x 28.6mm Head diameter
Weight: 365 grams (excluding batteries)

ANSI/PLATO FL1

	MODE	OUTPUT	RUNTIME	DISTANCE
HEAD	TURBO	3200 Lumens	1h	408m
	HIGH	1000 Lumens	3h 20min	232m
	MED	350 Lumens	11h20min	130m
	LOW	100 Lumens	46h	69m
	ECO	20 Lumens	170h	31m
	STROBE	3200 Lumens	/	/
TAIL	WHITE LIGHT	30 Lumens	43h 30min	*8m
	RED LIGHT	1.5 Lumens	150h	/
	RED FLASH	1.5 Lumens	/	/
	RED SOS	1.5 Lumens	/	/


*Tail light with a wide-range 8m beam diameter




3200 Lumens



Multifunctional
tail light



Separately
controlled
head&tail lights



Lockout
function



IP68
underwater 2m



TK35

2018
1300 LUMENS

PORTABLE SUPER BRIGHT FLASHLIGHT



NEW



XHP35HI
natural
white LED

480m beam
distance

Micro USB
charging
battery holder

Battery level
indication

Momentary
on strobe

S.O.S

IP68
underwater 2m

Battery: 2*18650
Size: 159.5mm Length x 43mm Body diameter x 48mm Head diameter
Weight: 271 grams (excluding batteries)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME	DISTANCE	
TURBO	1300 Lumens	3h 10min	480m	
HIGH	500 Lumens	5h 45min	294m	
MED	150 Lumens	21h 30min	161m	
LOW	50 Lumens	68h 15min	97m	
ECO	10 Lumens	235h	39m	
STROBE	1300 Lumens	/	/	
SOS	50 Lumens	/	/	



Outdoor mode

Tactical mode

OFF-Lockout
mode

CREE XHP70
LED

Innovative
toggle switch

Micro USB
charging
battery holder

Battery level
indication

Momentary
on strobe

S.O.S

IP68,
underwater 2m

Battery: 2*18650/4*CR123A
Size: 161mm Length x 50mm Head diameter
Weight: 240 grams (excluding batteries)

ANSI/PLATO FL1					
MODE	OUTPUT	TACTICAL MODE	OUTDOOR MODE	RUNTIME	DISTANCE
TURBO	3200 Lumens		✓	1h 30min	300m
	2000 Lumens	✓		2h	233m
HIGH	1000 Lumens		✓	3h 40min	169m
MED	350 Lumens		✓	10h 50min	100m
LOW	100 Lumens		✓	38h 40min	55m
ECO	20 Lumens		✓	152h	20m
STROBE	3200 Lumens	✓	✓	/	/
SOS	100 Lumens		✓	/	/

TK35

ULTIMATE EDITION 2018
3200 LUMNES


PORTABLE SUPER BRIGHT FLASHLIGHT



NEW

TK321000 LUMENS

LONG-RANGE HUNTING FLASHLIGHT




Battery: 1*18650/2*CR123A
Size: 159mm Length x 25.4mm Body diameter x 52mm Head diameter
Weight: 175 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	1000 Lumens	1h 50min	422m
HIGH	350 Lumens	4h 45min	245m
MED	100 Lumens	15h 25min	138m
LOW	8 Lumens	170h	40m
RED HIGH	105 Lumens	4h 15min	65m
RED LOW	15 Lumens	65h	23m
GREEN HIGH	165 Lumens	5h 30min	105m
GREEN LOW	30 Lumens	40h	45m

TK25R&B Version1000 LUMENS

LONG-RANGE HUNTING FLASHLIGHT



Battery: 1*18650/2*CR123A
Size: 142.6mm Length x 25.4mm Body diameter x 40mm Head diameter
Weight: 156.5 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	1000 Lumens	2h	225m
HIGH	300 Lumens	5h 20min	124m
MED	100 Lumens	22h20min	75m
LOW	15 Lumens	110h	25m
RED HIGH	150 Lumens	7h30min	132m
RED LOW	25 Lumens	40h	49m
BLUE	60 Lumens	6h40min	41m
STROBE	1000 Lumens	/	/



TK25

IR VERSION

1000 LUMENS

DUAL LIGHTING SOURCES TACTICAL FLASHLIGHT



- White and infrared
- Tactical dual tailswitches
- Rotary mode selection switching
- Quick-release belt clip
- IP68 underwater 2m

Battery: 1*18650/2*CR123A
Size: 142.6mm Length x 25.4mm Body diameter x 40mm Head diameter
Weight: 156.5 grams (excluding battery)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
TURBO	1000 Lumens	2h		225m
HIGH	300 Lumens	5h 20min		124m
MED	100 Lumens	22h20min		75m
LOW	15 Lumens	110h		25m
STROBE	1000 Lumens	/		/

TK25

Red VERSION

1000 LUMENS

DUAL LIGHTING HUNTING FLASHLIGHT

NEW



- White and red
- Tactical dual tailswitches
- Rotary mode selection switching
- IP68 underwater 2m

Battery: 1*18650/2*CR123A
Size: 142.6mm Length x 25.4mm Body diameter x 40mm Head diameter
Weight: 156.5 grams (excluding battery)

ANSI/PLATO FL1				
	MODE	OUTPUT	RUNTIME	DISTANCE
White Light	TURBO	1000 Lumens	2h	225m
	HIGH	300 Lumens	5h 20min	124m
	MED	100 Lumens	22h20min	75m
	LOW	15 Lumens	110h	25m
	STROBE	1000 Lumens	/	/
Red Light	HIGH	310Lumens/5500mW	2h35min	200m
	MED	100Lumens/1200mW	9h20min	105m
	LOW	10Lumens/90mW	100h	32m



Micro USB rechargeable
Inner waterproofing treatment



- Fully charged
- Charging

TK20R

1000 LUMENS

MICRO USB RECHARGEABLE

TACTICAL FLASHLIGHT

- Micro USB charging
- Inner waterproof charging port
- 310m beam distance

- Boot-up indication
- Dual layer body
- IP68 underwater 2m

Battery: 1*18650/2*CR123A
Size: 151.5mm Length x 25mm Body diameter x 34mm Head diameter
Weight: 141 grams (excluding battery)



ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		3500mAh	2900mAh	
TURBO	1000 Lumens	2h	1h 40min	310m
HIGH	350 Lumens	4h 20min	4h	193m
MED	150 Lumens	11h	10h 30min	126m
LOW	10 Lumens	160h	135h	31m
STROBE	1000 Lumens	/	/	/

TK16

1000 LUMENS

HIGH-PERFORMANCE TACTICAL FLASHLIGHT



- Tactical dual tail switches
- Four output levels
- Momentary on strobe
- Dual layer body
- IP68 underwater 2m

Battery: 1*18650/2*CR123A
Size: 140mm Length x 25mm Body diameter x 34mm Head diameter
Weight: 122 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	1000 Lumens	1h 10min	240m
HIGH	400 Lumens	3h 25min	155m
MED	150 Lumens	10h	97m
LOW	10 Lumens	150h	23m
STROBE	1000 Lumens	/	/

TK09

900 LUMENS

FAR-REACHING TACTICAL FLASHLIGHT



- 310m beam distance
- Strobe
- Momentary on turbo
- IP68, underwater 2m

Battery: 1*18650/2*CR123A
Size: 130mm Length x 25.4mm Body diameter x 34mm Head diameter
Weight: 105 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
HIGH	900 Lumens	1h 25min	310m
MED	450 Lumens	4h 55min	218m
LOW	50 Lumens	37h	72m
STROBE	900 Lumens	/	/

TK15

ULTIMATE EDITION

1000 LUMENS



- 325m beam distance
- Tactical tail switch
- Four output levels
- Stainless steel strike bezel
- IP68, underwater 2m

Battery: 1*18650/2*CR123A
Size: 142.5mm Length x 25.4mm Body diameter x 34mm Head diameter
Weight: 141 grams (excluding battery)


ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	1000 Lumens	2h	325m
HIGH	350 Lumens	4h 20min	194m
MED	150 Lumens	11h 30min	125m
LOW	10 Lumens	135h	31m
STROBE	1000 Lumens	/	/



PD SERIES

Portable, high-intensity flashlights

Fenix PD Series flashlights provide incredible performance with their exquisite designs and optimum size-to-output ratios. Whether they are for outdoor sports lighting or military and law enforcement, the PD Series models are your reliable partners anytime and anywhere.

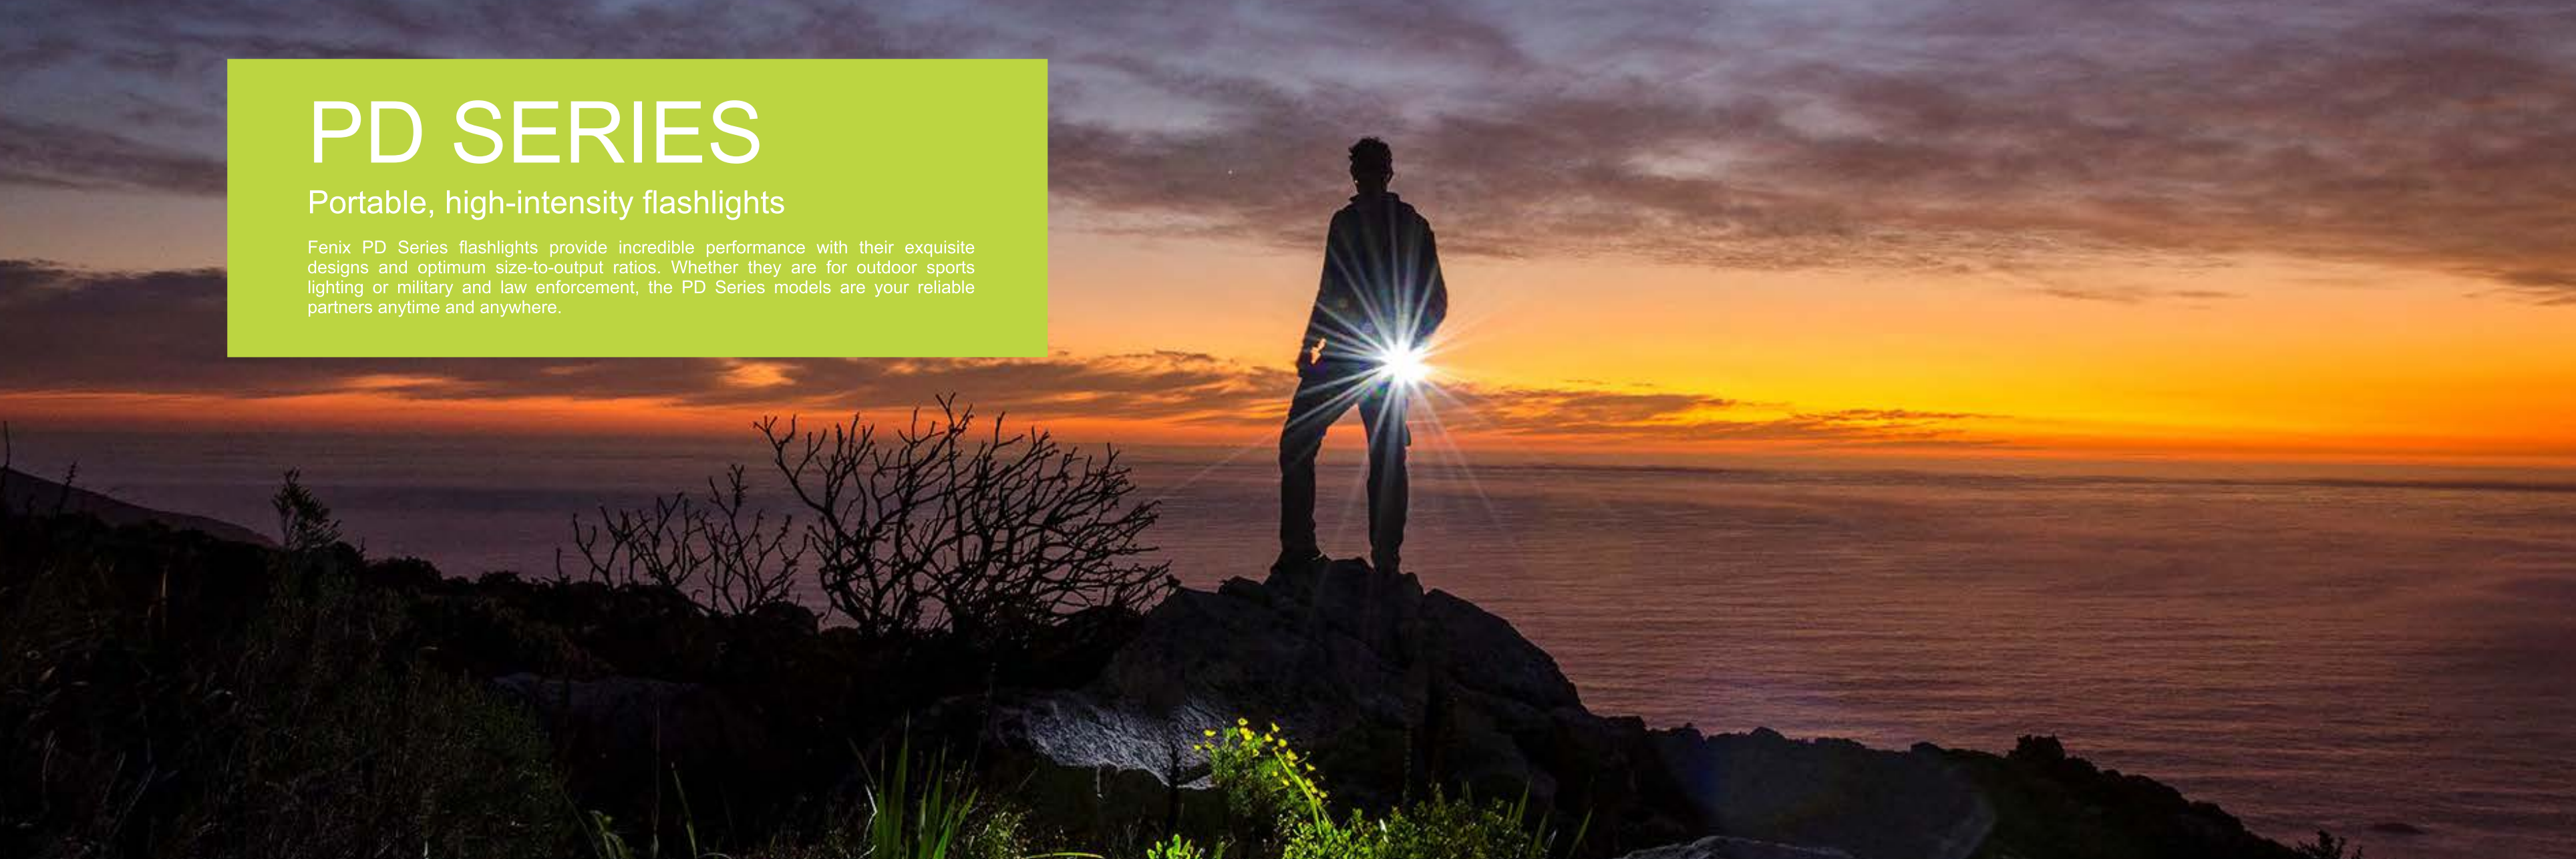



Convenient USB charging
Inner waterproofing treatment



Charging



Fully charged



Fitted with quad core
Cree XHP70 LED






Included 26650
rechargeable
Li-ion power
battery

PD40R 3000 Lumens MICRO USB RECHARGEABLE PORTABLE FLASHLIGHT



Battery: 1*26650 power battery
Size: 138.5mm Length x 34mm Body diameter x 30mm Head diameter
Weight: 126 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	3000 Lumens	12min	200m
HIGH	1000 Lumens	2h	123m
MED	350 Lumens	7h 25min	68m
LOW	100 Lumens	21h 15min	39m
ECO	20 Lumens	55h	16m
STROBE	1000 Lumens	/	/
SOS	350 Lumens	/	/



PD35 V2.0 1000 Lumens HIGH-PERFORMANCE PORTABLE FLASHLIGHT



NEW



Battery: 1*18650/2*CR123A
Size: 139mm Length x 25.4mm Diameter x 23mm Body diameter
Weight: 87 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	1000 Lumens	2h50min	250m
HIGH	350 Lumens	5h10min	157m
MED	150 Lumens	12h 25min	103m
LOW	50 Lumens	29h 30min	60m
ECO	3 Lumens	430h	13m
STROBE	1000 Lumens	/	/

27

PD35

TAC

1000 Lumens

HIGH-PERFORMANCE TACTICAL FLASHLIGHT



Battery: 1*18650/2*CR123A
Size: 137mm Length x 25.4mm Diameter
Weight: 89 grams (excluding battery)


ANSI/PLATO FL1					
MODE	OUTPUT	TACTICAL	OUTDOOR	RUNTIME	DISTANCE
TURBO	1000 Lumens	√	√	1h 10min	200m
HIGH	500 Lumens		√	2h 55min	135m
MED	200 Lumens		√	8h 30min	80m
LOW	60 Lumens	√	√	29h 15min	48m
ECO	8 Lumens		√	140h	17m
STROBE	1000 Lumens	√	√	/	/



PD32

900 Lumens

HIGH-PERFORMANCE POCKET FLASHLIGHT




Battery: 1*18650/2*CR123A
Size: 129.5mm Length x 22.6mm Body diameter x 24mm Head diameter
Weight: 77 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	900 Lumens	1h 55min	240m
HIGH	400 Lumens	4h	156m
MED	150 Lumens	10h 25min	97m
LOW	50 Lumens	37h 5min	52m
ECO	5 Lumens	260h	13m
STROBE	900 Lumens	/	/
SOS	50 Lumens	/	/

PD25

550 Lumens

HIGH-PERFORMANCE POCKET FLASHLIGHT




Battery: 1*16340/1*CR123A
Size: 93mm Length x 21.5mm Diameter
Weight: 47 grams (excluding battery)

ANSI/PLATO FL1						
MODE	OUTPUT		RUNTIME		DISTANCE	
	CR123A	16340	CR123A	16340	CR123A	16340
TURBO	400 lumens	550 lumens	1h 10min	35min	116m	130m
HIGH	150 lumens	150 lumens	3h 15min	2h 25min	71m	
MED	50 lumens	50 lumens	9h 5min	7h 10min	41m	
LOW	5 lumens	5 lumens	100h	53h	13m	
STROBE	400 lumens	550 lumens	/	/	/	

LD SERIES

Professional outdoor flashlights

Oriented towards the outdoor professional, Fenix develops its LD series flashlight with exquisite and compact design, which lessens the volume and reduces weight to the largest extent. With various output levels and a flashing function, the Fenix LD models can satisfy your various lighting needs, making them the preferred quality lighting devices for those highly difficult professional outdoor sport activities.

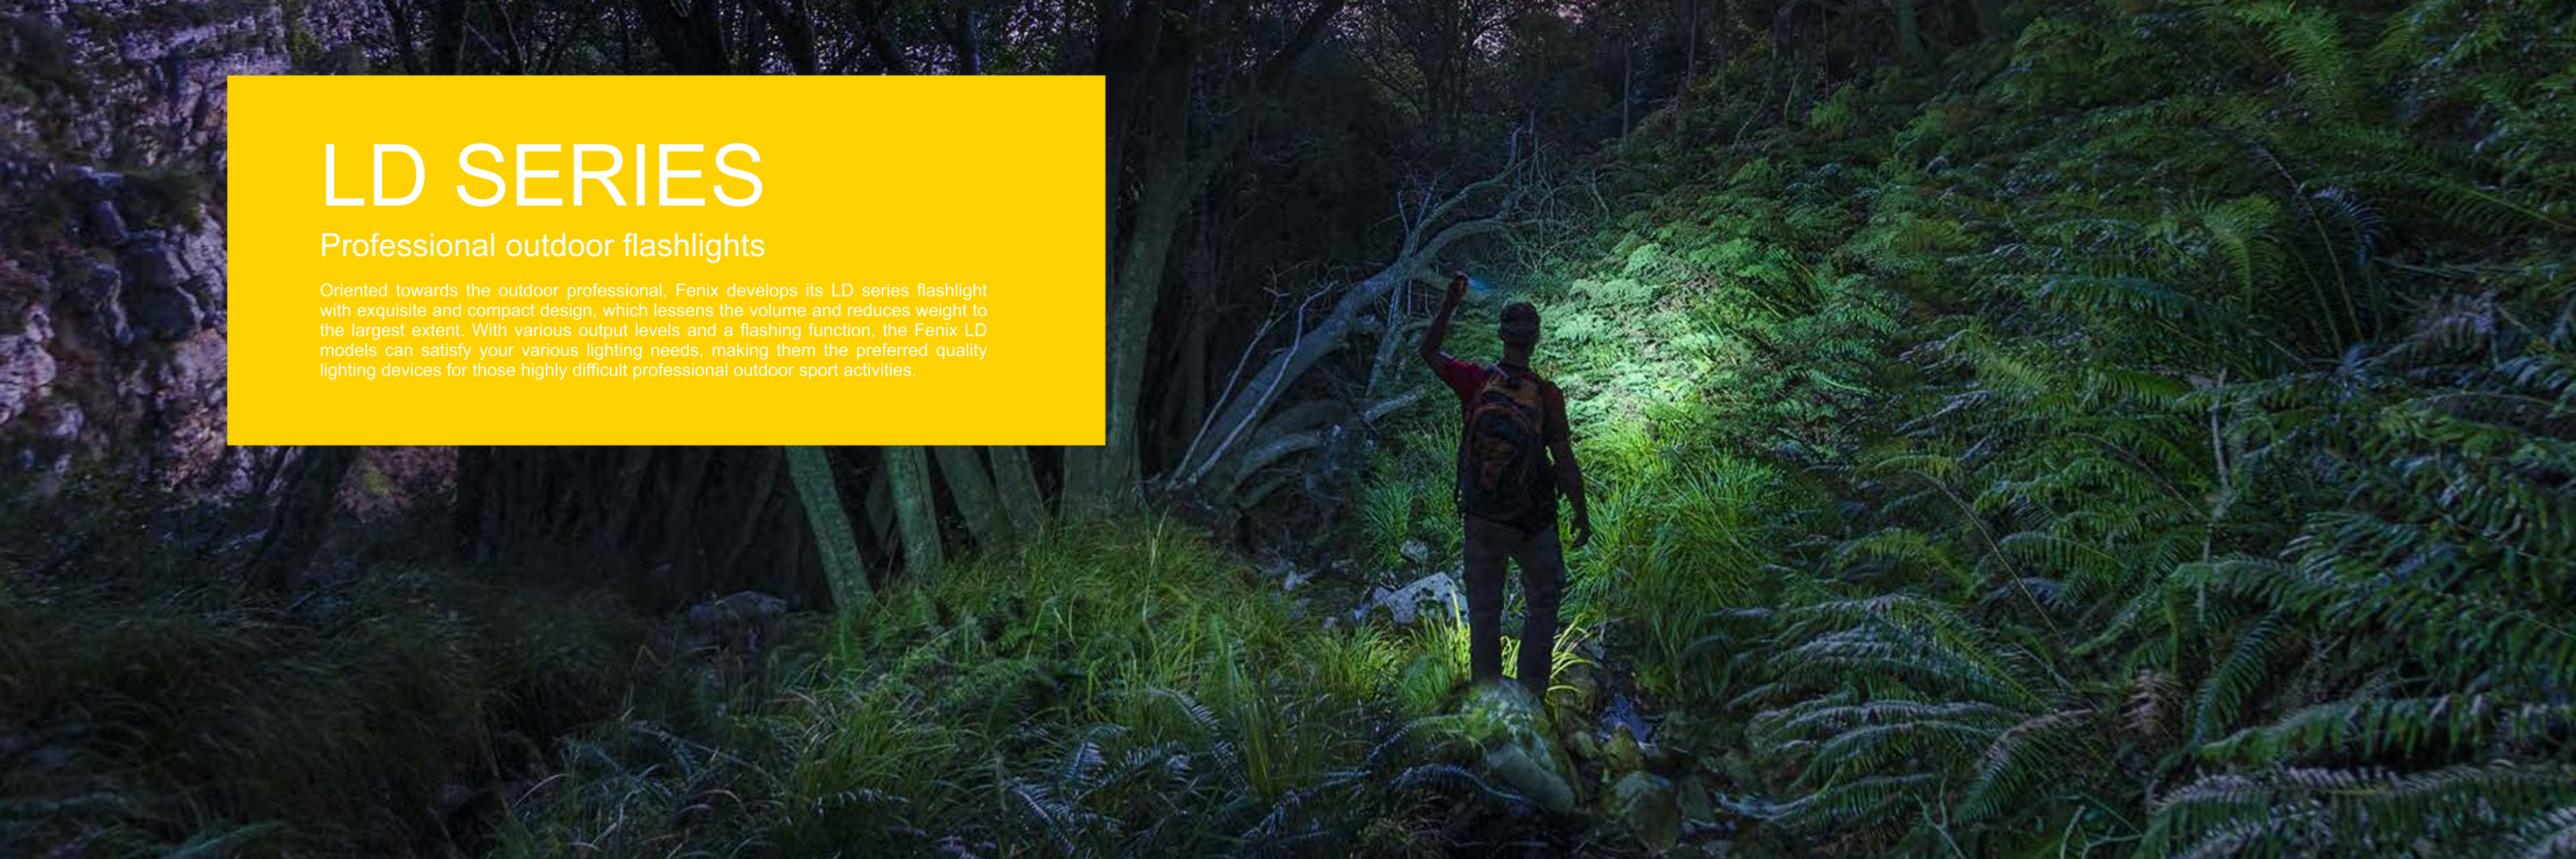

LD75C


4200 Lumens

PORTABLE SUPER BRIGHT MULTI-COLORED FLASHLIGHT



Battery: 4*18650/8*CR123A
Size: 158mm Length x 52mm Body diameter x 74mm Head diameter
Weight: 430 grams (excluding batteries)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME	DISTANCE	
TURBO	4000 Lumens	1h 30min	490m	
HIGH	1800 Lumens	3h	296m	
MED	600 Lumens	11h	176m	
LOW	200 Lumens	35h	100m	
ECO	40 Lumens	175h	45m	
STROBE	4000 Lumens	/	/	
Multi-colored LED	RED	14h	24m	
	GREEN	190 Lumens	11h	
	BLUE	45 Lumens	11h	
	WHITE	200 Lumens	11h	



LD41

960 Lumens

HIGH-PERFORMANCE 4AA OUTDOOR FLASHLIGHT




Battery: 4*AA
Size: 175mm Length x 40mm Diameter
Weight: 190 grams (excluding batteries)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME	DISTANCE	
TURBO	960 Lumens	1h	300m	
HIGH	400 Lumens	2h 25min	193m	
MED	150 Lumens	9h 30min	118m	
LOW	6 Lumens	200h	23m	
STROBE	960 Lumens	/	/	
SOS	150 Lumens	/	/	

LD22

300 Lumens

HIGH-PERFORMANCE 2AA OUTDOOR FLASHLIGHT



Battery: 2*AA
Size: 155mm Length x 21.5mm Diameter
Weight: 72 grams (excluding batteries)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		Alkaline	Ni-MH	
TURBO	300 Lumens	40min	1h 25min	120m
HIGH	100 Lumens	5h 5min	7h 10min	71m
MED	30 Lumens	22h 30min	25h 5min	40m
LOW	5 Lumens	90h	100h	14m
STROBE	300 Lumens	/	/	/
SOS	100 Lumens	/	/	/

LD09

220 Lumens

PORTABLE AA OUTDOOR FLASHLIGHT



Battery: 1*AA/1*14500

Size: 94mm Length x 19mm Diameter


Weight: 35 grams (excluding battery)

ANSI/PLATO FL1							
MODE	OUTPUT		RUNTIME			DISTANCE	
	Alkaline/Ni-MH	14500	Ni-MH	Alkaline	14500	Alkaline/Ni-MH	14500
HIGH	130 Lumens	220 Lumens	1h 45min	50min	1h	99m	120m
MED	50 Lumens		8h 5min	5h	5h 35min	59m	
LOW	3 Lumens		70h	43h	58h	18m	
SOS	50 Lumens		/	/	/	/	

LD02

100 Lumens

COMPACT AAA OUTDOOR FLASHLIGHT



Battery: 1*AAA

Size: 76mm Length x 15mm Diameter



Weight: 16 grams (excluding battery)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		Ni-MH	Alkaline	
HIGH	100 Lumens	45min	30min	45m
MED	25 Lumens	4h 15min	4h 15min	22m
LOW	8 Lumens	14h 30min	15h	12m

LD12

320 Lumens

PORTABLE HIGH-PERFORMANCE FLASHLIGHT

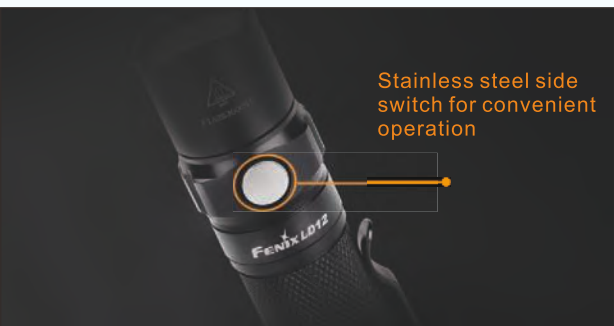

ANSI/PLATO FL1						
MODE	OUTPUT		RUNTIME			DISTANCE
	Alkaline/Ni-MH	14500	Alkaline	Ni-MH	14500	
TURBO	150 Lumens	320 Lumens	50min	1h 45min	1h	94m/135m
HIGH	70 Lumens		3h	5h 40min	3h 30min	67m
MED	30 Lumens		9h 40min	13h	11h	45m
LOW	5 Lumens		40h	60h	50h	18m
STROBE	150 Lumens	320 Lumens	/	/	/	/



Battery: 1*14500/1*AAA

Size: 102.5mm Length x 20.5mm Body diameter x 21.5mm Head diameter

Weight: 56 grams (excluding battery)

E SERIES

Outdoor flashlights

Adhering to the design concept of “Everyday carry + Easy to use”, Fenix develops the E series outdoor sport flashlights featuring simple and practical output levels, easy and fast operation, plus highly reliable design features such as water and impact resistance. The Fenix E series models are indispensable lighting devices for your outdoor sport activities and EDC.




E35

ULTIMATE EDITION

1000 Lumens

HIGH-PERFORMANCE EDC FLASHLIGHT



Battery: 1*18650/2*CR123A
Size: 122mm Length x 24mm Diameter
Weight: 72 grams (excluding battery)


ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	1000 Lumens	1h 50min	160m
HIGH	450 Lumens	4h	106m
MED	150 Lumens	11h 50min	61m
LOW	50 Lumens	42h 30min	37m
ECO	8 Lumens	150h	14m
STROBE	1000 Lumens	/	/
SOS	150 Lumens	/	/

E25

ULTIMATE EDITION

1000 Lumens

HIGH-PERFORMANCE EDC FLASHLIGHT




Battery: 2*14500/2*AA
Size: 161mm Length x 19.6mm Body diameter x 25.4 Head diameter
Weight: 87 grams (excluding battery)

ANSI/PLATO FL1						
MODE	OUTPUT		RUNTIME			DISTANCE
	Alkaline/Ni-MH	14500	Ni-MH	Alkaline	14500	
TURBO	/	1000 Lumens	/	/	50min	200m
HIGH	350 Lumens		1h 30min	50min	2h 15min	112m
MED	160 Lumens		4h 35min	2h 10min	5h 5min	76m
LOW	50 Lumens		13h 25min	13h 10min	16h 30min	43m
ECO	5 Lumens		100h	90h	95h	13m
STROBE	350 Lumens	1000 Lumens	/	/	/	/
SOS	160 Lumens		/	/	/	/

E20

265 Lumens

HIGH-PERFORMANCE EDC FLASHLIGHT





Battery: 2*AA
Size: 154mm Length x 21mm Body diameter x 25.4mm Head diameter
Weight: 90 grams (excluding batteries)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		Ni-MH	Alkaline	
TURBO	265 Lumens	1h 20min	30min	210m
HIGH	95 Lumens	6h 45min	4h 45min	118m
MED	35 Lumens	22h 35min	20h 5min	68m
LOW	8 Lumens	75h	75h	27m

E15

450 Lumens

MINI KEY CHAIN FLASHLIGHT

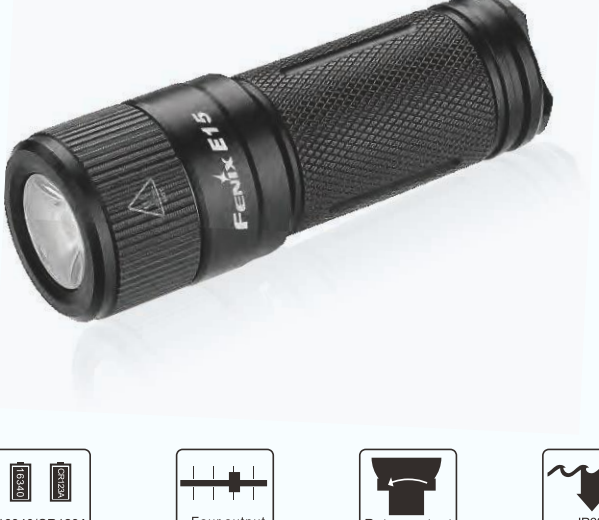

Battery: 1*16340/1*CR123A
Size: 64.8mm Length x 19mm Body diameter x 22mm Head diameter
Weight: 29 grams (excluding battery)


ANSI/PLATO FL1						
MODE	OUTPUT		RUNTIME		DISTANCE	
	16340	CR123A	16340	CR123A	16340	CR123A
TURBO	450 Lumens	270 Lumens	55 min	1h 35min	132m	91m
HIGH	110 Lumens		3h 15min	5h 5min		58m
MED	50 Lumens		9h 25min	12h 30min		38m
LOW	8 Lumens		40h	72h		15m

39

E12

130 Lumens

PORTABLE EDC FLASHLIGHT



Battery: 1*AA
Size: 90mm Length x 19mm Diameter
Weight: 28.5 grams (excluding battery)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		Ni-MH	Alkaline	
HIGH	130 Lumens	1h 30min	1h	88m
MED	50 Lumens	6h 30min	3h 30min	51m
LOW	8 Lumens	40h	22h	19m

E01

13 Lumens

SUPER MINI KEY CHAIN FLASHLIGHT



Battery: 1*AAA
Size: 71mm Length x 14.2mm Diameter
Weight: 14 grams (excluding battery)


ANSI/PLATO FL1		
OUTPUT	RUNTIME	DISTANCE
13 Lumens	16h 30min	21m



E05

85 Lumens

HIGH-PERFORMANCE EDC FLASHLIGHT



Battery: 1*AAA
Size: 66.5mm Length x 15mm Diameter
Weight: 12.5 grams (excluding battery)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		Ni-MH	Alkaline	
HIGH	85 Lumens	1h	45min	45m
MED	25 Lumens	4h 15min	4h 15min	18m
LOW	8 Lumens	15h 30min	15h	8m


MC SERIES

Angle lights


This Fenix MC series is designed so you can alter the direction of the light beam by adjusting the angle of the light head. The MC series is more versatile than you may need or imagine, be that by hanging it from the attachment hook, hooking it somewhere by using the pocket clip, putting it down somewhere and angling the head to where you need the beam, or even using it as a handheld flashlight, and is perfect for outdoor activities like camping, hiking or mountaineering. It is also perfect for those emergency situations where stronger lights are not necessary, like rescuing or repairs.

MC11 155 Lumens

MULTIFUNCTIONAL ANGLE FLASHLIGHT



90° adjustable head



Three output levels



Momentary on turbo



IP68, underwater 2m



Adjusts the beam when needed with 90° adjustable head

Battery: 1*AA

Size: 99mm Length x 21.5mm Body diameter x 25mm Head diameter

Weight: 64.8 grams (excluding battery)



ANSI/PLATO FL1

MODE	OUTPUT	RUNTIME		DISTANCE
		Ni-MH	Alkaline	
BURST	155 Lumens	/	/	75m
HIGH	105 Lumens	2h 15min	1h 40min	65m
MED	50 Lumens	6h	4h 45min	46m
LOW	3 Lumens	90h	100h	15m



FD SERIES

Adjustable focus lights

Rotating the head allows seamless transition between spotlight (for viewing at a distance) and floodlight (for up close illumination). Without doubt, Fenix FD Series is made for camping, caving, searching and photographing.



Super bright and far-reaching neutral white light







High-performance even and wide-range floodlight


FD65 3800 Lumens SUPER BRIGHT FOCUSING FLASHLIGHT

NEW

Battery: 4*18650
Size: 152.5mm Length x 50.5mm Body diameter x 61mm Head diameter
Weight: 431 grams (excluding batteries)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME	DISTANCE	
			SPOT	FLOOD
TURBO	3800 Lumens	3h	410m	86m
HIGH	1200 Lumens	5h	230m	49m
MED	400 Lumens	19h 40min	131m	29m
LOW	150 Lumens	40h 50min	85m	19m
ECO	50 Lumens	86h	52m	11m
STROBE	3800 Lumens	/	/	/
SOS	150 Lumens	/	/	/





CREE XP-L HI LED

Total reflective optical lens



Tactical tail switch

FD41 900 Lumens


360° FOCUSING TACTICAL FLASHLIGHT




Battery: 1*18650/2*CR123A
Size: 146mm Length x 25.4mm Body diameter x 40mm Head diameter
Weight: 160 grams (excluding battery)



360° rotary focusing



Total reflective lens



340m beam distance




Tactical tail switch



IP68 underwater 2m


ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME	DISTANCE	
			SPOT	FLOOD
TURBO	900 Lumens	1h 40min	340m	47m
HIGH	350 Lumens	3h 50min	218m	30m
MED	150 Lumens	10h 15min	141m	20m
LOW	10 Lumens	150h	37m	6m
STROBE	900 Lumens	/	/	/

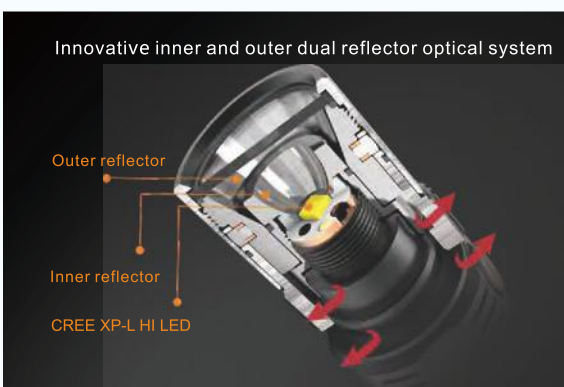

Outer reflector

Inner reflector

CREE XP-L HI LED

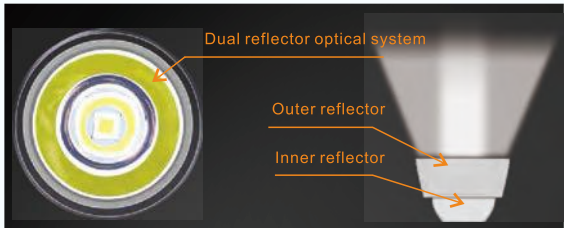

Dual reflector optical system

Outer reflector

Inner reflector



Tactical tail switch

Stainless steel side switch

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME	DISTANCE	
			SPOT	FLOOD
TURBO	900 Lumens	2h	200m	67m
HIGH	350 Lumens	4h 30min	117m	43m
MED	150 Lumens	11h	77m	28m
LOW	50 Lumens	40h 30min	44m	16m
ECO	8 Lumens	170h	17m	8m
STROBE	900 Lumens	/	/	/

360° rotary focusing




FD30 900 Lumens


360° FOCUSING PORTABLE FLASHLIGHT



360° rotary focusing




Dual reflector optical system



200m beam distance



Tactical tail switch





IP68 underwater 2m

Battery: 1*18650/2*CR123A
Size: 140.5mm Length x 23mm Body diameter x 25.4mm Head diameter
Weight: 96 grams (excluding battery)

FD45 900 Lumens
4AA FOCUSING FLASHLIGHT

NEW



Battery: 4*AA
Size: 121.2mm Length x 39mm Body diameter x 40mm Head diameter
Weight: 208 grams (excluding batteries)

ANSI/PLATO FL1					
MODE	OUTPUT	RUNTIME	DISTANCE		
			SPOT	FLOOD	
TURBO	900 Lumens	1h 30min	333m	46m	
HIGH	350 Lumens	3h 40min	206m	29m	
MED	150 Lumens	8h 25min	132m	19m	
LOW	50 Lumens	26h 20min	80m	12m	
ECO	5 Lumens	120h	35m	6m	
STROBE	900 Lumens	/	/	/	
SOS	50 Lumens	/	/	/	



FD20 350 Lumens
NEW-STYLE 2AA FOCUSING FLASHLIGHT



ANSI/PLATO FL1					
MODE	OUTPUT	RUNTIME		DISTANCE	
		Ni-MH	Alkaline	SPOT	FLOOD
TURBO	350 Lumens	36min	2h	115m	48m
HIGH	100 Lumens	4h	7h 30min	61m	25m
MED	50 Lumens	12h	16h 40min	44m	18m
LOW	8 Lumens	55h	80h	17m	7m


Battery: 2*AA
Size: 153.2mm Length x 20mm Body diameter x 25.4mm Head diameter
Weight: 87 grams (excluding batteries)



RC/UC SERIES

Powerful, reliable, rechargeable

Taking advantage of environmental-friendliness and low operating costs, Fenix's rechargeable flashlights can quickly regain power by recharging rechargeable Li-ion batteries, using USB charging from standard AC as well as onboard vehicle charging outlets and personal computers. The charging operation is very simple and convenient. Featuring toughness, reliability and a fully waterproof design, a Fenix rechargeable flashlight is your best choice for military and law enforcement use, hunting, searching and rescuing, etc.

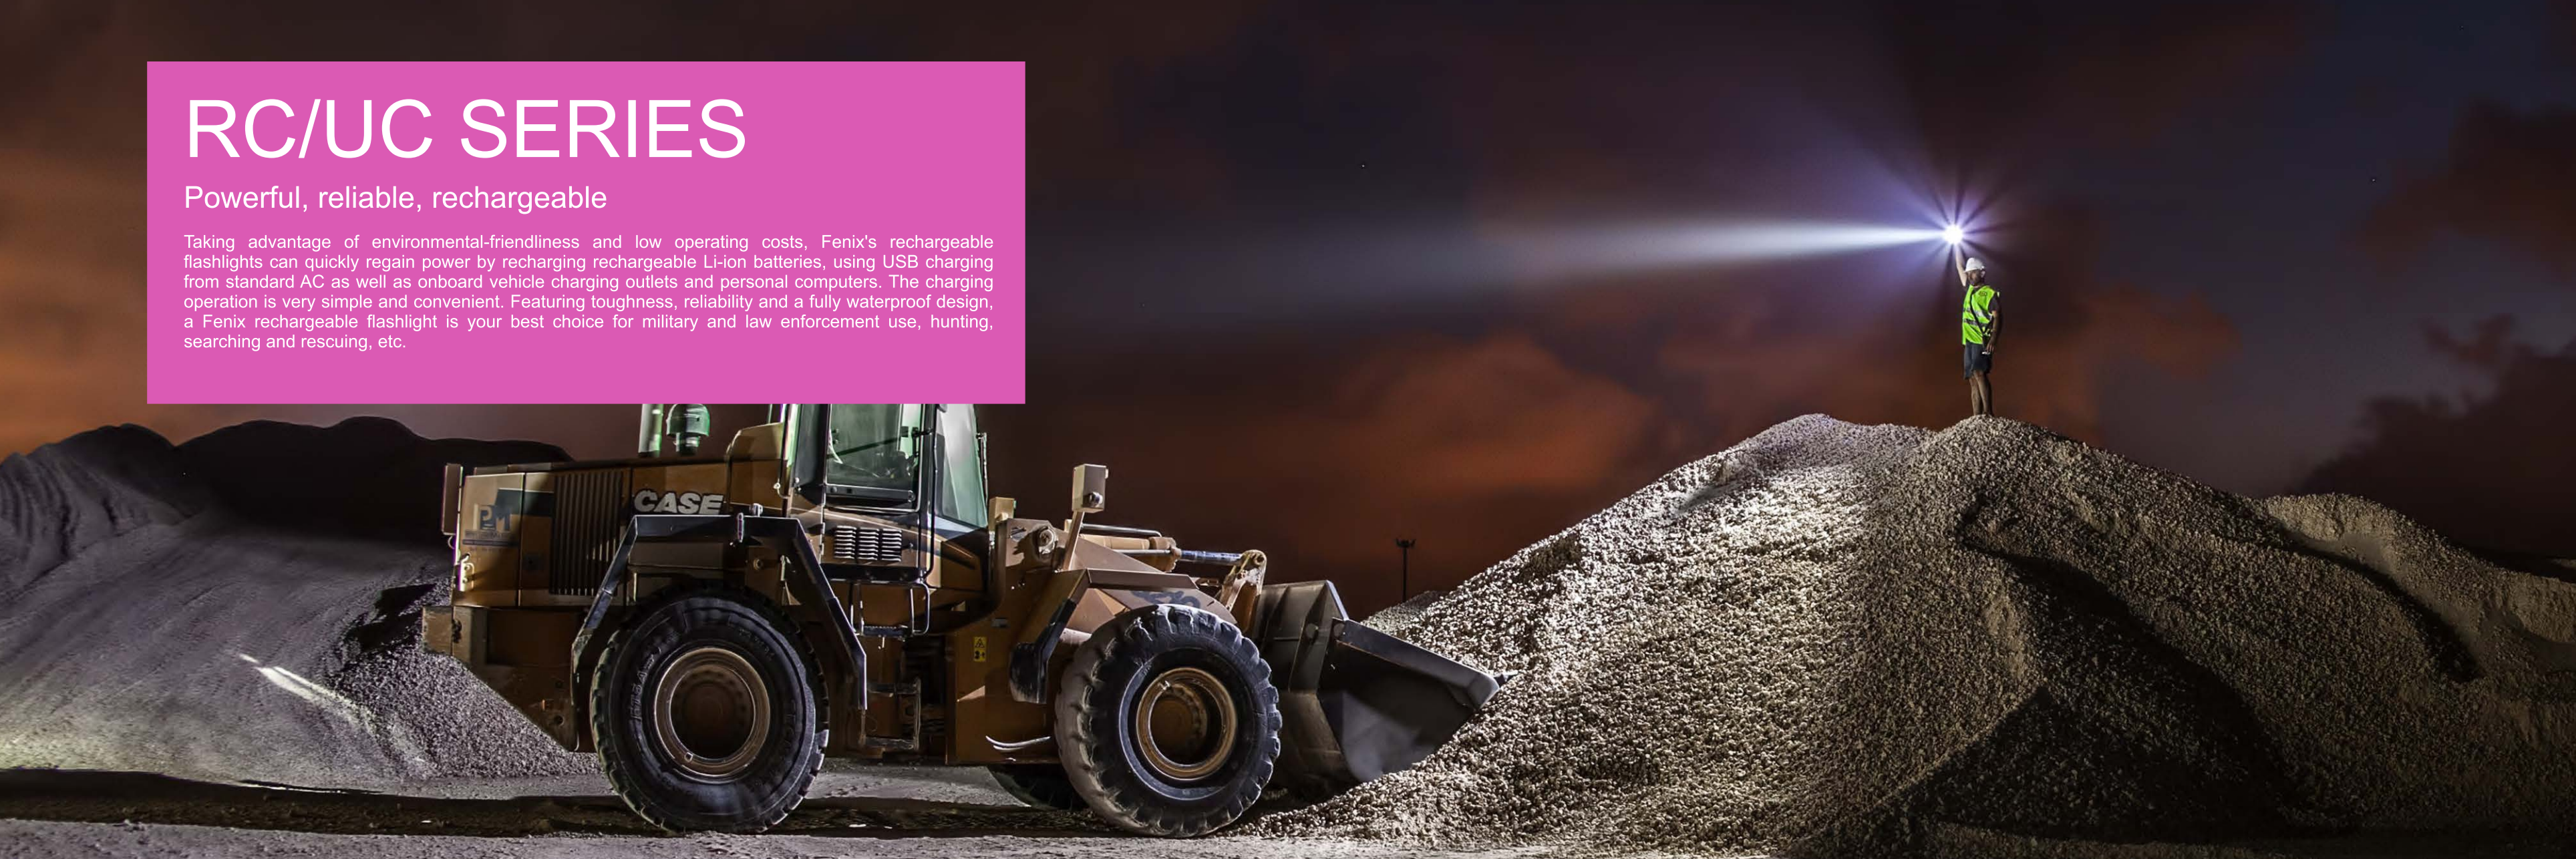


51

RC40


6000 Lumens

SUPER BRIGHT RECHARGEABLE FLASHLIGHT



Battery: Tailored 7800mAh/7.4V Li-ion battery pack
Size: 272mm Length x 52mm Body diameter x 108mm Head diameter
Weight: 1234 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	6000 Lumens	1h	730m
HIGH	4000 Lumens	1h 50min	633m
MED	2000 Lumens	4h 5min	444m
LOW	500 Lumens	18h 15min	221m
ECO	45 Lumens	125h	58m
STROBE	6000 Lumens	/	/
SOS	500 Lumens	/	/



52

RC20

1000 Lumens

SUPER BRIGHT RECHARGEABLE SEARCHING FLASHLIGHT



Battery: Tailored 2600mAh/3.7V Li-ion battery pack
Size: 161mm Length x 25.4mm Body diameter x 40mm Head diameter
Weight: 205 grams (excluding battery)


ANSI/PLATO FL1					
MODE	OUTPUT	GENERAL MODE	SIMPLIFIED MODE	RUNTIME	DISTANCE
TURBO	1000 Lumens	✓	✓	1h 10min	290m
HIGH	425 Lumens	✓		2h 55min	183m
MED	150 Lumens	✓	✓	9h 50min	108m
LOW	10 Lumens	✓		120h	29m
STROBE	1000 Lumens	✓	✓	/	/

53

RC11

1000 Lumens

18650 MAGNETIC CHARGING OUTDOOR FLASHLIGHT



Charging indicator

Battery: 1*18650/2*CR123A
Size: 113.5mm Length x 25.4mm Diameter
Weight: 70 grams (excluding battery)


ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	1000 Lumens	1h 20min	190m
HIGH	500 Lumens	2h 50min	134m
MED	150 Lumens	11h 10min	72m
LOW	50 Lumens	29h 30min	43m
ECO	10 Lumens	135h	14m
STROBE	1000 Lumens	/	/

53

RC09

550 Lumens

MAGNETIC CHARGING EDC FLASHLIGHT



Battery: 1*16340/1*CR123A
Size: 72mm Length x 21.5mm Diameter
Weight: 45 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	550 Lumens	35min	115m
HIGH	150 Lumens	2h35min	60m
MED	50 Lumens	8h55min	36m
LOW	5 Lumens	56h	12m

RC05

300 Lumens

14500 MAGNETIC OUTDOOR FLASHLIGHT



Battery: 1*14500/1*AA
Size: 94mm Length x 19mm Diameter
Weight: 36.8 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	300 Lumens	55min	90m
HIGH	150 Lumens	2h	60m
MED	50 Lumens	6h	37m
LOW	5 Lumens	40h	11m
STROBE	300 Lumens	/	/

UC52

3100 Lumens

SUPER BRIGHT INTELLIGENT FLASHLIGHT

NEW




Battery: Built-in 3500mAh/7.2V Li-ion battery
Size: 153.5mm Length x 42mm head diameter x 25.9mm Body thickness
Weight: 276 grams (including battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	3100 Lumens	42 min	253m
HIGH	1000 Lumens	2h 45min	145m
MED	350 Lumens	8h 15min	85m
LOW	100 Lumens	27h 30min	44m
ECO	15 Lumens	82h 30min	18m
STROBE	1000 Lumens	/	/
SOS	100 Lumens	/	/

UC35

960 Lumens

USB RECHARGEABLE TACTICAL FLASHLIGHT

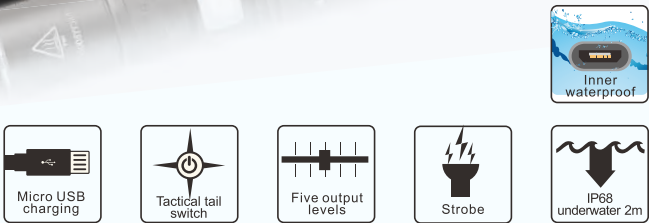

Battery: 1*18650/2*CR123A
Size: 153.5mm Length x 42mm head diameter x 26mm Diameter
Weight: 276 grams (including battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	960 Lumens	1h 30min	253m
HIGH	480 Lumens	2h 40min	145m
MED	180 Lumens	9h 15min	85m
LOW	50 Lumens	38h	44m
ECO	14 Lumens	150h	18m
STROBE	960 Lumens	/	/

55

UC301000 LumensNEW

USB RECHARGEABLE TACTICAL FLASHLIGHT



There colors of spare rubber

- Micro USB charging
- XP-L HI LED
- Battery level indication
- One switch control
- Five output levels
- Strobe



Battery: 1*18650/2*CR123A
Size: 130mm Length x 25.4mm Diameter
Weight: 77 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	1000 Lumens	1h 25min	253m
HIGH	350 Lumens	3h 20min	156m
MED	150 Lumens	8h 45min	101m
LOW	50 Lumens	28h 25min	58m
ECO	5 Lumens	150h	21m
STROBE	1000 Lumens	/	/

UC09500 LumensNEW

USB RECHARGEABLE RIGHT-ANGLE FLASHLIGHT



- Micro USB charging
- XP-G3 neutral white LED
- Right-angle illumination
- Battery level indication
- Red signal light
- Magnetic absorption base



Battery: 1*16340/1*CR123A
Size: 70mm Length x 19mm Diameter
Weight: 39 grams (excluding battery)

ANSI/PLATO FL1				
	MODE	OUTPUT	RUNTIME	DISTANCE
White Light	TURBO	500 Lumens	1h 20min	85m
	HIGH	150 Lumens	2h 50min	46m
	MED	300 Lumens	13h20min	23m
	LOW	5 Lumens	110h	6m
Red Light	RED	3Lumens	30h	/
	SIGNAL LIGHT	3Lumens	/	/
	SOS	3Lumens	/	/

UC02SS130 Lumens

USB RECHARGEABLE KEYCHAIN FLASHLIGHT



- Stainless steel material
- Micro USB charging
- Two color options
- Twisty operation
- IP68 underwater 2m



Battery: 1*10180
Size: 43.2mm Length x 14mm Head diameter
Weight: 18.4 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
HIGH	130 Lumens	25min	48m
LOW	10 Lumens	3h 50min	14m

UC02130 Lumens

USB RECHARGEABLE KEYCHAIN FLASHLIGHT



- Micro USB charging
- Three color options
- Twisty operation
- IP68 underwater 2m

Battery: 1*10180
Size: 43.2mm Length x 14mm Head diameter
Weight: 8 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
HIGH	130 Lumens	25min	48m
LOW	10 Lumens	3h 50min	14m


SD SERIES

Underwater sport lights

Fenix SD series is born for underwater sport. This series are all fitted with neutral white LED's for better color rendering, which ensures better vision when diving. A virtually indestructible dual layer body protects the core circuit and battery compartments from the cold outside temperatures and high pressures of the deep, and strong corrosion resistance means you won't have to compromise when diving, even to a depth of 100 meter.

SD20

1000 Lumens
HIGH-OUTPUT DIVING FLASHLIGHT



Battery: 2*18650/4*CR123A
Size: 208mm Length x 26mm Body diameter x 40mm Head diameter
Weight: 245 grams (excluding batteries)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
WHITE	HIGH	1000 Lumens	3h
	LOW	400 Lumens	7h 30min
RED	105 Lumens	8h	73m



Rotating magnetic ring for output selections

Twist the flashlight head to get access to three lighting modes and turn the light on and off.



Battery compatibility

Powered by two 18650 batteries or four CR123A batteries.

SD11 1000 Lumens



DIVING AND PHOTOGRAPHING FLASHLIGHT



Underwater photography


Battery: 1*18650/2*CR123A
Size: 138mm Length x 26mm Body diameter x 34mm Head diameter
Weight: 132.5 grams (excluding battery)

ANSI/PLATO FL1				
MODE		OUTPUT	RUNTIME	DISTANCE
WHITE	HIGH	1000 Lumens	2h	45m
	LOW	500 Lumens	3h 40min	30m
R+		250 Lumens	3h	23m



SE10 100 Lumens
3AA INTRINSICALLY SAFE EXPLOSION-PROOF FLASHLIGHT

II 1G Ex ia IIC T4 Ga /II 1D Ex ia IIIC T135°C Da explosion-proof classifications



Battery: 3*AA
Size: 177.5mm Length x 53mm Width x 51mm Height
Weight: 164 grams (excluding batteries)

ANSI/PLATO FL1		
OUTPUT	RUNTIME	DISTANCE
100 Lumens	12h 50min	160m

HP SERIES

High-performance separated headlamps

Taking full advantage of modern lighting technology and creative design, Fenix successfully develops the HP series headlamps with outstanding performance. By using a metal housing and constant brightness regulating circuit, Fenix's HP series produces much brighter beams and offer more functions, a longer runtime and better durability than competitors. With IP68 rated structure, the Fenix HP models will satisfy your various lighting needs whether searching and rescuing, caving, cycling, mountaineering and hiking, etc.




63

HP30R

1750 Lumens

RECHARGEABLE SPOT- AND FLOODLIGHT HEADLAMP



Battery: 2*18650/4*CR123A
Size: Headlamp: 77mm Length x 52mm Width x 34mm Height
Battery case: 115mm Length x 56mm Width x 30mm Height
Weight: 285 grams (excluding batteries)


ANSI/PLATO FL1				
	MODE	OUTPUT	RUNTIME	DISTANCE
SPOTLIGHT	TURBO	1000 Lumens	4h	202m
	HIGH	400 Lumens	6h 30min	124m
	MED	130 Lumens	21h	72m
FLOODLIGHT	LOW	30 Lumens	83h	34m
	TURBO	750 Lumens	4h	61m
	HIGH	400 Lumens	6h	46m
	MED	130 Lumens	23h	27m
	LOW	5 Lumens	400h	7m
	SOS	130 Lumens	46h	/

64

HP15

ULTIMATE EDITION
900 Lumens

SEPARATED HIGH-OUTPUT HEADLAMP



Battery: 4*AA
Size: Headlamp: 67.4mm Length x 55.9mm Width x 34.7mm Height
Battery case: 88.8mm Length x 73.7mm Width x 26.2mm Height
Weight: 154.2 grams (excluding batteries)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		Ni-MH	Alkaline	
BURST	900 Lumens	/	/	178m
HIGH	400 Lumens	3h 30min	3h 10min	119m
MED	150 Lumens	10h	8h	73m
LOW	50 Lumens	40h	44h	42m
ECO	10 Lumens	160h	170h	19m
SOS	50 Lumens	/	/	/

65



HP25R

1000 Lumens

HIGH-OUTPUT MOUNTAINEERING SPOT- AND FLOODLIGHT HEADLAMP



	MODE	OUTPUT	RUNTIME	DISTANCE
FLOODLIGHT	HIGH	350 Lumens	2.5h	44m
	MED	130 Lumens	9h	25m
	LOW	30 Lumens	40h	13m
	ECO	4 Lumens	150h	6m
SPOTLIGHT	TURBO	1000 Lumens	1.5h	187m
	HIGH	350 Lumens	4.5h	109m
	MED	130 Lumens	12h	66m
	LOW	30 Lumens	42h	34m
	RED	0.2 Lumens	96h	/
	RED FLASH	0.2 Lumens	192h	/

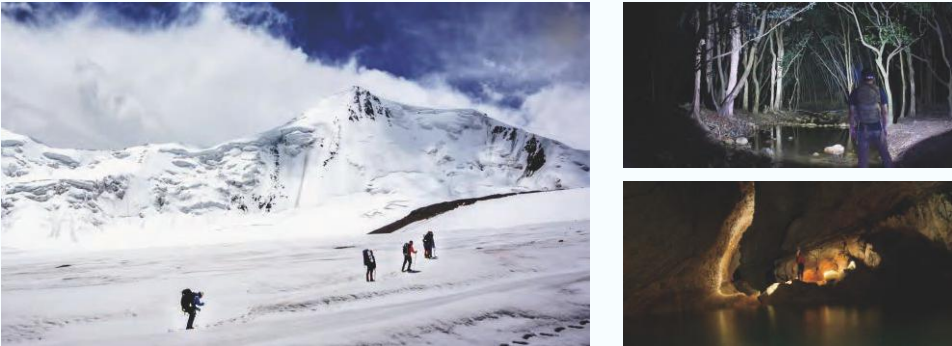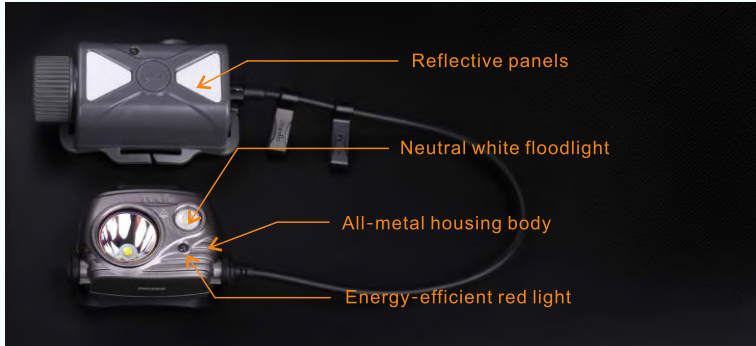


Battery: 1*18650/2*CR123A
Size: Headlamp: 60mm Length x 54mm Width x 32.5mm Height
Battery case: 82.5mm Length x 50mm Width x 35mm Height
Weight: 183.5 grams (excluding batteries)

HM SERIES

High-performance integrated headlamps

The HM series of headlamps are high-performance and hugely reliable headlamps made for rigid outdoor environments. The all-metal housing design is extremely tough, being dustproof, waterproof and highly resistant to impacts and cold. In addition, this series features long runtime and excellent heat dissipation. It is a series of multipurpose headlamps, especially suitable for high altitude climbing and long-distance hiking in rigid environments.

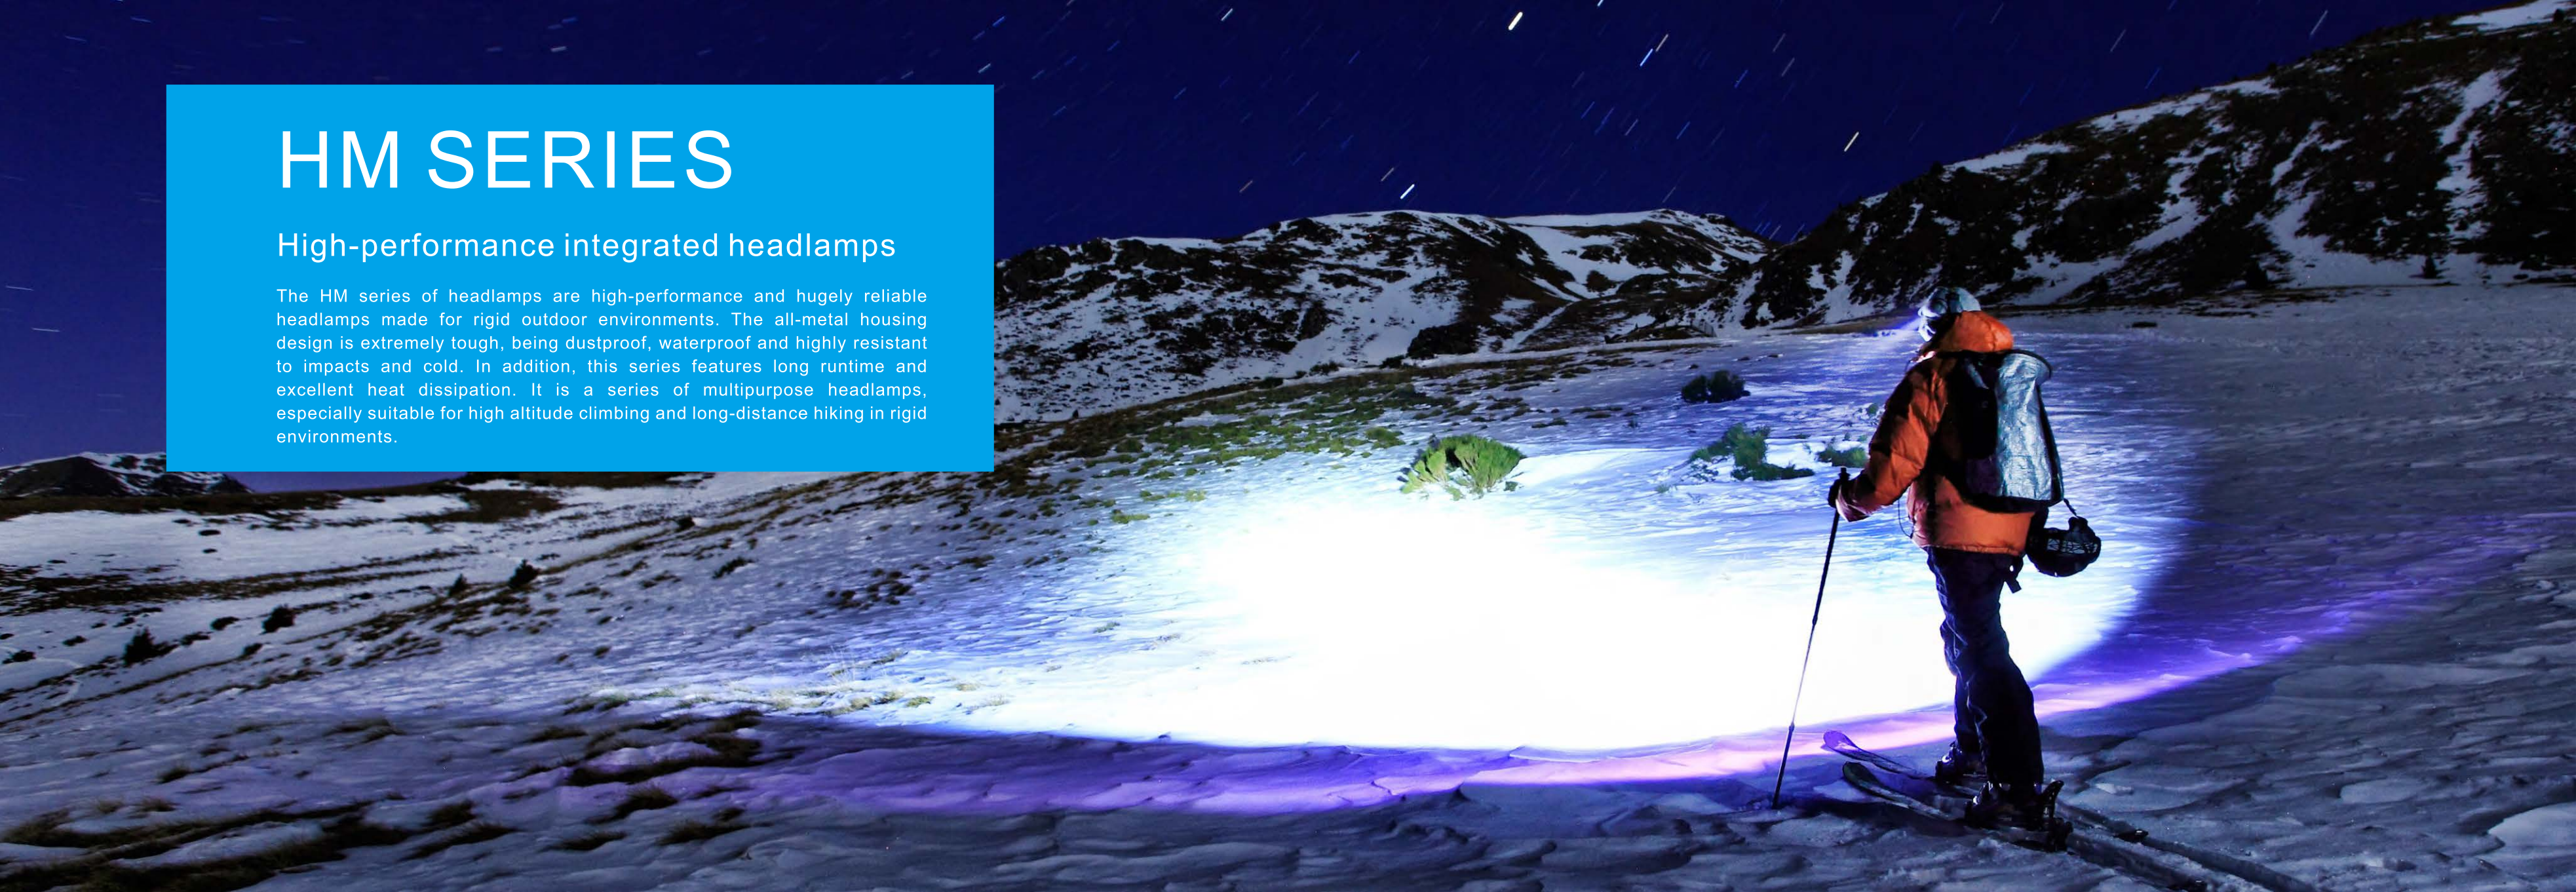

67

HM50R

500 Lumens

NEW

RECHARGEABLE COLD-RESISTANT MULTIPURPOSE HEADLAMP



- Micro USB charging
- Battery level indication
- Reflective/sweat-channeling headband
- IP68 underwater 2m

Battery: 1*16340/1*CR123A
Size: 67.5mm Length x 33mm Width x 28mm Height
Weight: 63 grams (excluding battery)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		CR123A	16340	
TURBO	500 Lumens	2h	2h 30min	80m
HIGH	130 Lumens	14h	10h	42m
MED	30 Lumens	48h	24h	20m
LOW	4 Lumens	128h	90h	6m



- White&red light sources
- High-performance neutral white
- Micro USB charging
- Battery level indication
- Black and desert yellow
- IP68 underwater 2m

Battery: 1*18650/2*CR123A
Size: 87mm Length x 46mm Width x 51mm Height
Weight: 121 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	950 Lumens	48min	116m
HIGH	400 Lumens	3h	76m
MED	150 Lumens	10h	46m
LOW	50 Lumens	29h	27m
ECO	5 Lumens	100h	8m
RED LIGHT	1 Lumen	100h	/

68

HL55

900 Lumens

ONE 18650 POWERED INTEGRATED HEADLAMP



- 900 lumens burst mode
- One switch control
- High-performance neutral white
- IP68 underwater 2m

Battery: 1*18650/2*CR123A
Size: 84mm Length x 46mm Width x 48mm Height
Weight: 115 grams (excluding battery)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
BURST	900 Lumens	/	116m
HIGH	420 Lumens	3h 45min	79m
MED	165 Lumens	10h	50m
LOW	55 Lumens	30h	29m
ECO	10 Lumens	150h	12m

69

HL23

150 Lumens

INTEGRATED TRI-PROOF HEADLAMP



- Waterproof, dustproof, shockproof
- One switch control
- Three output levels
- Grey, gold and green
- IP68 underwater 2m

Battery: 1*AA
Size: 71mm Length x 38.9mm Width x 40mm Height
Weight: 52 grams (excluding battery)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		Ni-MH	Alkaline	
HIGH	150 Lumens	1h 20min	1h	55m
MED	50 Lumens	5h 40min	4h 25min	32m
LOW	3 Lumens	100h	110h	8m

HL SERIES

Lightweight outdoor headlamps

With exquisite appearance, excellent performance and wide-ranging output options, Fenix develops the HL series with optimum weight-to-output ratios. Waterproof rating is IP68, and with their high lumen output, are ideal for outdoor hiking, jogging, climbing, camping and any form of daily use, making you enjoy real outdoor fun in various environments and weather conditions.



HL40R

600 Lumens

Eco-friendly headlamp

High-performance focusing headlamp



- Focusing design

Micro USB charging

Battery level indication

Momentary on turbo

Grey and blue

IP66 rated protection

Battery: Built-in 2000mAh Li-ion battery pack
Size: 68mm Length x 54mm Width x 42mm Height
Weight: 130 grams (including battery)

NEW

ANSI/PLATO FL1					
MODE	OUTPUT	RUNTIME	DISTANCE		
			FLOODLIGHT	SPOTLIGHT	
GENERAL MODE	BURST MODE	600 Lumens	1h 20min	43m	147m
	HIGH	300 Lumens	4.5h	29m	96m
	MED	130 Lumens	11h	19m	64m
	LOW	70 Lumens	22h	14m	46m
	ECO	30 Lumen	50h	9m	30m
FUNCTIONAL MODE	READING	4 Lumens	200h	4m	10m
	SOS	30 Lumens	100h	9m	30m

HL32R

600 Lumens

Eco-friendly headlamp

Rechargeable multipurpose outdoor headlamp



- Neutral white and red light

Micro USB charging

Battery level indication

Reflective/sweat-channeling headband

Grey and blue

S.O.S

IP66 rated protection

Battery: Built-in 2000mAh Li-ion battery pack
Size: 64mm Length x 46mm Width x 37.5mm Height
Weight: 108 grams (including battery)

NEW

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME	DISTANCE	
GENERAL MODE	BURST MODE	600 Lumens	1h	73m
	TURBO	300 Lumens	4.5h	49m
	HIGH	130 Lumens	14h	34m
	MED	70 Lumens	24h	23m
	LOW	30 Lumens	60h	16m
	ECO	4 Lumens	200h	7m
FUNCTIONAL MODE	RED	1 Lumen	100h	4m
	SOS	30 Lumens	120h	16m
	RED FLASH	1 Lumen	200h	4m

HL12R

400 Lumens

Eco-friendly headlamp

Rechargeable dual lighting outdoor headlamp



- White and red light sources

Micro USB charging

Battery level indication

Momentary on turbo

Reflective/sweat-channeling headband

Grey, purple and blue

IP66 rated protection

Battery: Built-in 1000mAh Li-polymer battery pack
Size: 56mm Length x 40mm Width x 31.9mm Height
Weight: 73.3 grams (including battery)

NEW

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME	DISTANCE	
GENERAL MODE	BURST MODE	400 Lumens	1h	64m
	HIGH	130 Lumens	8h	36m
	MED	70 Lumens	13h	26m
	LOW	30 Lumens	33h	17m
	ECO	4 Lumens	110h	7m
FUNCTIONAL MODE	RED	1 Lumen	40h	3m
	SOS	30 Lumens	66h	17m
	RED FLASH	1 Lumen	80h	3m

HL30 2018
300 Lumens

NEW

HIGH-PERFORMANCE HIKING&CAMPING HEADLAMP




Battery: 2*AA
Size: 64mm Length x 50mm Width x 38mm Height
Weight: 73.5 grams (excluding batteries)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME	DISTANCE	
GENERAL MODE	TURBO	300 Lumens	4.5h	50m
	HIGH	130 Lumens	9h	35m
	MED	70 Lumens	41h	23m
	LOW	30 Lumens	71h	16m
	ECO	4 Lumens	200h	6m
FUNCTIONAL MODE	RED	1 Lumen	170h	4m
	SOS	30 Lumens	142h	16m
	RED FLASH	1 Lumen	340h	4m

HL16 70 Lumens


NEW

DUAL LIGHTING SOURCE PARENT-CHILD HEADLAMP



Battery: 1*AA
Size: 61.5mm Length x 39.5mm Width x 36mm Height
Weight: 55 grams (excluding battery)

ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		镍氢	碱性	
HIGH	70 Lumens	3h	2.5h	35m
MED	30 Lumens	7h	7h 30min	24m
LOW	4 Lumens	60h	58h	8m
RED	1 Lumen	75h	85h	/
RED FLASH	1 Lumen	150h	170h	/

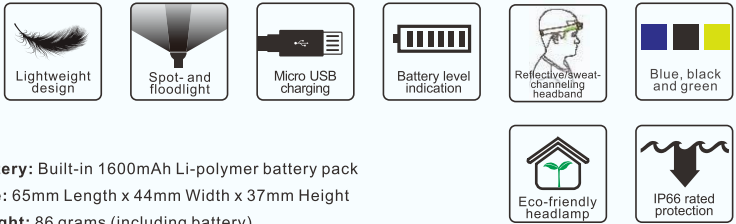

Battery: Built-in 1600mAh Li-polymer battery pack
Size: 65mm Length x 44mm Width x 37mm Height
Weight: 86 grams (including battery)



ANSI/PLATO FL1				
	MODE	OUTPUT	RUNTIME	DISTANCE
SPOTLIGHT	TURBO	450 Lumens	1h 30min	100m
	HIGH	130 Lumens	6h	57m
	MED	70 Lumens	12h	42m
	LOW	30 Lumens	25h	30m
FLOODLIGHT	HIGH	40 Lumens	13h	10m
	LOW	4 Lumens	100h	4m
	SOS	40 Lumens	26h	/

75

HL10

70 Lumens

MULTIPURPOSE MINI HEADLAMP



Battery: 1*AAA
Size: 70mm Length x 25mm Width x 23mm Height
Weight: 33 grams (excluding battery)


ANSI/PLATO FL1				
MODE	OUTPUT	RUNTIME		DISTANCE
		Ni-MH	Alkaline	
HIGH	70 Lumens	1h	40min	30m
MED	30 Lumens	3h10min	2h 30min	19m
LOW	4 Lumens	26h	24h	6m

75

HL15

200 Lumens

LIGHTWEIGHT RUNNING HEADLAMP



Battery: 2*AAA
Size: 63mm Length x 41.5mm Width x 35mm Height
Weight: 60 grams (excluding batteries)

ANSI/PLATO FL1					
MODE	OUTPUT	RUNTIME		DISTANCE	
		镍氢	碱性		
TURBO	200 Lumens	1h 10min	1h 30min	50m	
HIGH	70 Lumens	3h 30min	4h	29m	
MED	30 Lumens	8h 30min	12h 30min	18m	
LOW	4 Lumens	37h	58h	8m	
EOC	0.2 Lumens	75h	85h	/	
RED FLASH	0.2 Lumens	150h	170h	/	





BICYCLE LIGHT SERIES


Coming from a strong innovation background, Fenix's bicycle lights feature a Dual Distance Beam System, meaning they provide both close-up visibility and long range illumination together with a broad flood beam. With a user-friendly structural design, quality material and IPX6 waterproof rating, Fenix bicycle lights are the rider's best choice, and ensure users a safe and excellent riding experience during night riding.


BC30R


1800 Lumens


HIGH-PERFORMANCE OLED DISPLAY BICYCLE LIGHT





- 


OLED digital display
- 


High-performance neutral white light
- 

Micro USB charging
- 

One cable control
- 

Dual Distance Beam System
- 

Quick-release handlebar mount
- 

Momentary on Burst
- 

IP66 rated protection

Battery: Built-in 5200mAh/3.7V rechargeable battery
Size: 114mm Length x 50.5mm Width x 31.8mm Height
Weight: 240 grams (including battery and excluding mount)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
BURST	1800 Lumens	/	161m
HIGH	1000 Lumens	2h 40min	122m
MED	400 Lumens	7h 20min	76m
LOW	150 Lumens	16h 10min	47m
ECO	50 Lumens	36h	28m
FLASHING	150 Lumens	/	/



NEW

BC30

1800 Lumens

INTEGRATED SUPER BRIGHT BICYCLE LIGHT



- 

Dual Distance Beam System
- 

Momentary on burst
- 


Quick-release handlebar mount
- 

IP66 rated protection

Battery: 2*18650/4*CR123A
Size: 126.7mm Length x 50mm Width x 31.8mm Height
Weight: 161 grams (excluding batteries and mount)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
BURST	1800 Lumens	/	170m
HIGH	1200 Lumens	1h 50min	135m
MED	500 Lumens	5h	87m
LOW	200 Lumens	11h	56m
ECO	100 Lumens	20h	41m
FLASHING	200 Lumens	/	/


BT30R 1800 Lumens
RECHARGEABLE HIGH-PERFORMANCE
SEPARATED BICYCLE LIGHT



Battery: Included BA2B battery pack, A4C battery case is available (2*18650/4*CR123A)
Size: Headlight: 74mm Length x 50.6mm Width x 43.5mm Height
Battery pack: 87mm Length x 59mm Width x 37mm Height
Weight: Headlight: 92 grams
Battery pack: 168 grams

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
BURST	1800 Lumens	/	170m
HIGH	1200 Lumens	1h 50min	135m
MED	500 Lumens	5h 15min	83m
LOW	200 Lumens	12h 50min	57m
ECO	100 Lumens	22h 35min	40m
FLASHING	200 Lumens	/	/

BC21R 880 Lumens
RECHARGEABLE PORTABLE BICYCLE LIGHT

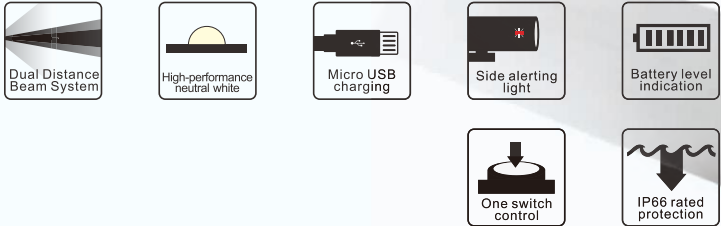

Battery: 1*18650/2*CR123A
Size: 113mm Length x 40.5mm Width x 43mm Height
Weight: 91 grams (excluding battery and mount)

ANSI/PLATO FL1			
MODE	OUTPUT	RUNTIME	DISTANCE
TURBO	880 Lumens	1h 20min	125m
HIGH	380 Lumens	4h 30min	86m
MED	200 Lumens	8h 30min	62m
LOW	100 Lumens	15h 50min	44m
FLASH	380 Lumens & 100 Lumens	/	/



A photograph of a glowing orange tent pitched in a snowy mountain landscape. The tent is illuminated from within, casting a warm orange light. The surrounding environment is a vast, snow-covered mountain range with steep slopes and some evergreen trees visible in the distance. The sky is a deep blue, suggesting dusk or dawn. The overall scene conveys a sense of adventure and outdoor exploration.

CAMPING LANTERN SERIES


Fenix's camping lanterns are all about innovation, and provide all-rounder performance. From the icy cold North Pole to the rain-soaked tropical forests, Fenix's all-weather waterproof lanterns provide thorough, uncompromising performance. Features listing from an exclusive dual-fuel battery compartment to multifaceted globe and a magnetic base, Fenix's camping lanterns keep your adventure going, anywhere, anytime!

CP30R

400 Lumens

NEW

RECHARGEABLE MULTIFUNCTIONAL MODULE CAMPING LANTERN

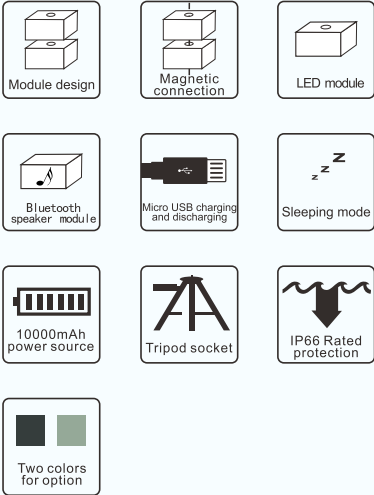

Battery: Built-in 10000mAh Li-polymer battery
Size: 72mm Length x 72mm Width x 122.5mm Height
Weight: 550 grams (including battery)

MODE	OUTPUT	RUNTIME	BEAM DIAMETER
TURBO	400 Lumens	5h	25m (Max)
HIGH	200 Lumens	13h	
MED	80 Lumens	27h	
LOW	16 Lumens	130h	
SLEEPING MODE	40 Lumens	1h	

CL30R

650 Lumens

RECHARGEABLE HIGH-PERFORMANCE CAMPING LANTERN



Battery: 1 to 3 rechargeable 18650 Li-ion battery
Size: 93mm Length x 93mm Width x 136mm Height
Weight: 412 grams (excluding battery)

MODE	OUTPUT	RUNTIME		BEAM DIAMETER
		2600mAh	3500mAh	
TURBO	650 Lumens	4h 30min	6h	35m (Max)
HIGH	350 Lumens	9h	12h	
MED	100 Lumens	38h	51h	
LOW	50 Lumens	70h	93h	
ECO	10 Lumens	300h	400h	
FLASHING	100 Lumens	70h	93h	

CL25R

350 Lumens

RECHARGEABLE HIGH-PERFORMANCE ALL-SEASON CAMPING LANTERN



ISPO
AWARD
ISPO(Asia) Award Gold Winner

MODE	OUTPUT	RUNTIME		BEAM DIAMETER
		18650	CR123A	
TURBO	350 Lumens	2h 15min	2h 5min	25m (Max)
HIGH	200 Lumens	5h	4h 10min	
MED	50 Lumens	23h 45min	18h 50min	
LOW (MOONLIGHT)	0.8 Lumens	600h	500h	
RED CONSTANT-ON	1.5 Lumens	44h	42h	
RED FLASH	1.5 Lumens	/	/	



Battery: 1*18650/2*CR123A
Size: 52mm Length x 52mm Width x 99mm Height
Weight: 130 grams (excluding battery)



CL20R 300 Lumens

NEW

RECHARGEABLE DUAL LIGHTING SOURCE
CAMPING LANTERN




Battery: Built-in 1600mAh Li-polymer battery
Size: 72mm Length x 41.5mm Width x 50mm Height
Weight: 91 grams (including battery)



MODE	OUTPUT	RUNTIME	BEAM DIAMETER
TURBO	300 Lumens	6h	15m (Max)
HIGH	130 Lumens	12h	
MED	40 Lumens	20h	
LOW	1 Lumen	200h	
RED	1.5 Lumens	24h	
RED FLASH	1.5 Lumens	/	

CL09 200 Lumens

ULTRA-PORTABLE HIGH-PERFORMANCE CAMPING LANTERN

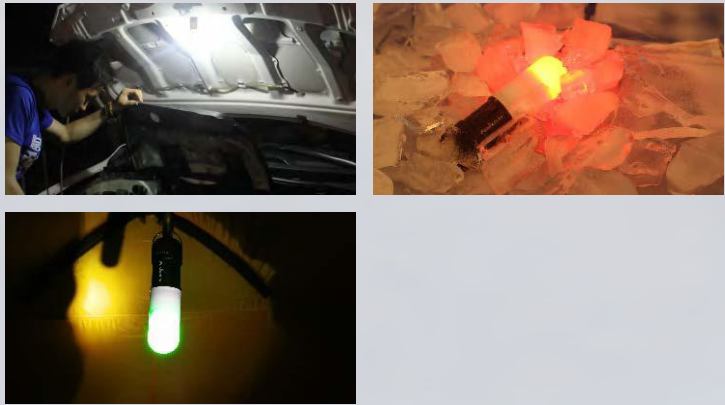

NEW



Iron grey

Black



Battery: 1*ARB-L16-700U/ 1*16340/ CR123A battery
Size: 78.5mm Length x 22mm Diameter
Weight: 31.5 grams (excluding battery)

MODE	OUTPUT	RUNTIME		BEAM DIAMETER
		ARB-L16-700U	CR123A	
TURBO	200 Lumens	2h 40min	6h	10m (Max)
HIGH	80 Lumens	5h 40min	19h	
MED	30 Lumens	19h 20min	36h	
LOW	1 Lumen	90h	150h	
RED	5 Lumens	30h	48h	
RED FLASH	5 Lumens	/	/	
GREEN	5 Lumens	48h	76h	

89

HALBERD T5Ti TITANIUM TACTICAL PEN


NEW



Size: 138.5mm Length x 12.5mm Diameter
Weight: 40 grams
Body material: TC4Titanium alloy
Pen refill material: Schmidt P950M
Strike bezel material: Tungsten steel hard alloy
Three color options: Space grey, Storm blue, Aurora purple

HALBERD T5 ALUMINUM ALLOY TACTICAL PEN

NEW



Size: 136mm Length x 12.5mm Diameter
Weight: 27.5 grams
Body material: 6061-T6 aircraft-grade aluminum alloy
Pen refill material: Refer to the label
Strike bezel material: Tungsten steel hard alloy
Surface processing: HAIII hard-anodized





ACCESSORIES

Fenix has been striving, and succeeded to develop some creative accessories to enhance and dramatically improve the performance of flashlights. Currently, Fenix has several kinds of accessories, including diffuser tips, filter adapters, traffic wands, remote switches, etc. to satisfy consumers' requirements.



Filter Adapter (AOF-S/S+/M/L)

This is a Fenix flashlight accessory with outstanding filtering ability to maintain strong red/blue/green light which can be used when signaling.

- Uses a toughened ultra-clear glass lens with anti-reflective coating that provide heat resistance and maximum light penetrability.
- Anti-roll design, easy to attach, easy to remove.



Traffic Wand (AOT-S/M/L)

Fenix traffic wand can convert your flashlight into a glowing orange high-visibility wand. It's the best option for emergency situations and traffic control.



Rechargeable batteries

A protective circuit is built into the anode and covered with a riveted steel hat. The battery is fully covered with the steel shell, thus eliminating the potential risk of short circuiting caused by collision or impact.

- Prevent short circuit
- Multiple protection
- 500 charge cycles

NEW

MODEL	TYPE	CAPACITY	VALTAGE
ARB-L4-4800	26650	4800 mAh	3.7V
ARB-L18-3500	18650	3500 mAh	3.6V
ARB-L18-3400	18650	3400 mAh	3.6V
ARB-L18-2900	18650	2900 mAh	3.6V
ARB-L18-2600	18650	2600 mAh	3.6V
ARB-L16-700	16340	700 mAh	3.6V
ARB-L14-800	14500	800 mAh	3.6V
ARB-L18-3500U	18650+USB	3500 mAh	3.6V
ARB-L18-2600U	18650+USB	2600 mAh	3.6V
ARB-L16-700U	16340+USB	700 mAh	3.6V
ARB-L14-1600U	14500+USB	1600 mAh	1.5V
ARB-L26-4500P	26650	4500 mAh	3.6V
ARB-L18-2900L	18650	2900 mAh	3.6V



Remote Pressure Switch (AER-01)

- Durable for over 100,000 activations. Flashlight is activated by pressing any one of the four sensors.
- Cable made from resilient PU material; coiled length 23cm, expanded length 80cm
- The tail cap is made from T6-grade aluminum with Type III hard-anodized finish for durability and scratch resistance.
- Side switch on the tail cap is capable of transmitting current of 1A for a long period of time, and is independent from the pressure pad switch
- Waterproof to IPX8 standard
- The tail cap is 25.4mm in diameter, 40mm in length.
- Pressure pad switch, cable and the tail cap weigh 53.2 grams total



Tactical Remote Pressure Switch (AER-02)

- Noiseless (no click) pressure pad switch (30mm long)with a lifespan of 100000 activations; capable of transmitting current of 3A for a long period of time
- Tactical tail switch capable of constant-on function, and can transmit 3A current for a long period of time
- Velcro design for fast and convenient operation.
- Cable made from resilient PU material can be extended from 24cm to 80cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized anti-abrasive finish.
- Waterproof to IPX8 standard
- Tail adapter size: Diameter: 25.4mm (1.0 in) Length: 31.5mm (1.2 in)
- Work with Fenix TK15UE,TK09,PD35TAC,PD35,PD32,UC35 flashlights
- Including pressure pad switch, coiled cable and tail adapter
- Total weight: 65g



Tactical Remote Pressure Switch (AER-03)

Featuring momentary on, constant on and output selection (functions may vary between flashlights), the Fenix AER-03 is dedicated for tactical flashlights. Noiseless (no click)design, with attached Velcro makes it convenient for tactical missions or hunting.

- Work with Fenix TK32, TK16, TK20R(only for ON/OFF operation) flashlights
- Noiseless (no click) pressure pad switch (30mm long)with a lifespan of 100,000 activations, featuring output selection and capable of transmitting current of 3A for a long period of time
- Tactical tail switch capable of constant-on/momentary-on function, and can transmit 3A current for a long period of time
- Velcro design for fast and convenient operation
- Cable made from resilient PU material can be extended from 24cm to 80cm
- Tail adapter is made from T6-grade aluminum, type hard-anodized anti-abrasive finish
- Including pressure pad switch, coiled cable and tail adapter
- Waterproof to IPX8 standard
- Tail adapter size: Diameter: 26.5mm (1.0 in) Length: 31.5mm (1.2 in) Total weight: 65 grams (2.3 oz)



Diffuser Tip (AOD-S / M / L)

Diffuser tips can soften the light and work as a camping light, signal light, reading light, tent light, etc.

- Durable, impact resistant and fireproof to V2 Standard



Rail Mount (ALG-01)

- Adjustable diameter design allows use with a wide range of flashlights
- Universal slide-in flashlight ring
- With plastic spacer – flashlights with diameter 23.6 mm-24.2 mm can be fitted
- Without plastic spacer – flashlights with diameter 25.4 mm-26.0 mm can be fitted



Rail Mount (ALG-00)

ALG-00 features the quick detachable Picatinny rail design which suits for tactical firearms with fish oil Picatinny rails. The compatible flashlight diameter ranges from 22.5-26mm, and wrench is needed when clip flashlights. Full-metal housing made of durable aircraft-grade aluminum, and premium type III hard-anodized anti-abrasive finish in all black treatment without light reflection.



Quick-release Bike Mount (ALB-10)

Utilizing a unique split-type design for quick release of flashlights, the Fenix ALB-10 bicycle mount can effectively reduce the amount of steps and the time needed for mounting. Featuring Fenix's solidity and compatibility with a wide range of flashlights, this mount will ensure your safety during your night riding.

- Split-type design for quick release
- Fits flashlights with diameter of 18mm—26mm
- Rotating 30 degree design adjusts to any locking angle
- High-quality rubber mat provides shock-resistant and slip-resistant grip without scratching the handlebar
- Anti-aging, solid and able to withstand extended exposure to sunlight and rain



Car Adapter (ARW-10)

- Compatible with ARE-C2, ARE-C1, ARE-C2+, ARE-C1+



AFH-01 Portable Flashlight Tool Case

- Compatible with many Fenix products
- Double layer design expands storage capacity
- Liner made of environmentally friendly EVA
- Material features cushioning, impact resistance, thermal insulation and moisture resistance
- Case is made from PP environmental material
- External size: 280×220×80mm (11×8.7×3.1 in)
- Weight: 594 grams (20.9 oz) case only



Helmet Attachment Hook Kit (ALD-02)

The ALD-02 helmet attachment hook set consists of four plastic hooks, which are designed to prevent the headband from slipping off the helmet.

- Environmentally friendly PC material
- 4 helmet attachment hooks included
- Applicable to helmet with thickness less than 6 mm
- Not for fully protective helmets or helmets with foam lining



Headlamp Attachment (ALG-03)

ALG-03 headlamp attachment is specifically designed for HL55 and HL60R fixation to outdoor or industrial work helmets. It enables easy and convenient attachment and detachment of headlamp to and from helmet, and allows adjustment of the lighting angle of the headlamps. In addition, it uses thickened blown-sponge, to fit to more helmets in various ways.

- Durable nylon material ;
- 3M and TESA adhesive tapes are included ;
- Easy attachment.



Four Channels Smart Charger (ARE-C2+)

Fenix ARE-C2+ is a four channels smart charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level
- Compatible with different types of Li-ion and Ni-MH / Ni-Cd batteries
- AC and DC charging modes
- Input: AC100-240V/50-60Hz/0.35A (max) or DC12-24V/1A (max)
- Output: Li-ion battery 4.2V, 1.0A, Ni-MH / Ni-Cd battery 1.5V, 1.0A
- Rated output power: 6W (Ni-MH/ Ni-Cd), 16.8W (Li-ion)
- Built-in short circuit protection, over current protection, over voltage protection and reverse polarity protection



Dual Channel Smart Charger (ARE-C1⁺)

Fenix ARE-C1+ is a dual channel smart charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level
- Compatible with different types of Li-ion and Ni-MH / Ni-Cd batteries
- AC and DC charging modes
- Input: AC100-240V/50-60Hz/0.35A (max) or DC12-24V/1A (max)
- Output: Li-ion battery 4.2V, 1.0A, Ni-MH / Ni-Cd battery 1.5V, 1.0A
- Rated output power: 3W (Ni-MH/ Ni-Cd), 8.4W (Li-ion)
- Built-in short-circuit protection, over-current protection, over-voltage protection and reverse polarity protection



Single Channel Smart Charger (ARE-X1)

The Fenix ARE-X1 is a single channel smart charger designed for 18650 and 26650 batteries, and provides charging, discharging and battery power detection.

- Compatible with one 18650 or one 26650 rechargeable Li-ion battery
- Supports micro USB charging and USB discharging
- LED charging/discharging indicator
- LED battery power detection
- Microcomputer chip controlled, digitally regulated charging to extend battery lifetime
- Short circuit, overcurrent, overvoltage and reverse polarity protection



Dual Channel Smart Charger (ARE-X2)

The Fenix ARE-X2 dual channel smart charger chooses the correct charging current for each battery inserted, for any battery between the 26650 and 10440. It also features micro USB charging and discharging, and LED charging/discharging indicators clearly inform you of the charging status.

- Compatible types of batteries
- Able to charge identical or different batteries sizes simultaneously
- Micro USB charging/USB discharging
- Be able to charge same kind or different kinds of batteries simultaneously
- Micro USB battery charging, USB battery discharging
- Chooses corresponding charging mode depending on each type of battery
- Built-in circuit protects batteries against overcharging, over-discharging, short circuiting and improper battery insertion
- LED charging/discharging indicators



TK75 Extended Runtime Kit (AET-TK75)

The runtime of the TK75 can be extended with the addition of body tube segments and battery holders. Each segment added extends the runtime equal to the runtime of one TK75.

- Install the kit facing the right direction
- Runtime equal to the runtime of one TK75 is gained with the addition of each extended runtime kit
- The use of more than three kits in one TK75 flashlight is not recommended



Single Channel Smart Charger (ARE-X1⁺)

Fenix ARE-X1+, the single channel smart battery charger, is built for different sizes of rechargeable Li-ion batteries, as well as Ni-MH and Ni-Cd batteries. In addition, the Micro USB charging port offers versatile universality. While charging, the user-friendly LCD screen indicates the battery level and charging status clearly. Built-in multi-protection guarantees charging safety.

- Compatible with different battery types
- Micro USB charging port
- LCD screen for displaying battery level and charging status
- Multi-protection circuits



Solar power charger(ARS-11)

- Eight American SUNPOWER solar panels
- USB port, max 5V/0.5A
- Desert digital camouflage 900D antique nylon fabric
- Mobile phone bag, portable hanging buckle
- Rated power: 12W
- Size: 138*78*40mm (Length*Width*Thickness)
- Weight: 380 grams

NEW



Power bank(ARP-10000)

- All-metal housing
- Battery capacity: 10000mAh/3.7V (37wh)
- 75% electricity output even under -40℃
- LED displays battery level, charging and discharging status
- Input port: Micro USB, output port: USB
- Input: 5V/2A (max), output: 5V/2A
- IP68 rated protection, 1.5m impact resistance
- Size: 150*76*17.5mm (Length*Width*Height)
- Weight: 332 grams
- Conforms to certificates of CE, FCC, RoHS and WEEE
- Short circuit protection, over-current protection, over-voltage protection and reverse-polarity protection
- Micro-computer chip controlled digitally regulated charging to extend battery lifetime

NEW



MULTI-PURPOSE SNAP HOOK (ALB-20)

- Quick release, stable wearing
- Bottle opener
- Straight screwdriver
- Non-magnetizable
- Size: 53.8 *28.6 *3.5mm (Length * Width * Thickness)
- Weight: 9 g
- Material: Titanium alloy TC4



Emergency Whistle (NW20)

Fenix turns a world of emergency preparedness experience with reliable lighting products into these high-output whistles. Whether injury, disaster or personal threats are present, the easy-blowing design takes 30% less effort to reach up to 120 decibels peak output. Pealess construction from food-grade stainless steel provides decades of confidence even in harsh outdoor environments.

- Unique sounding chamber
- Max 120-decibel sound intensity
- Pore structure and pealess design
- Made of food-grade stainless steel



ACCESSORIES COMPATIBILITY GUIDE

MODEL	Filter Adapter				Diffuser Tip			Traffic Wand			Battery						Remote Switch		Rail Mount		Bike Mount	MODEL		
	AOF				AOD			AOT			ARB						AER		ALG		ALB			
	S	S+	M	L	S	M	L	S	M	L	L14 14500	L14/USB 14500	L16 16340	L2 18650	L18 18650	L18/USB 18650	L4 26650	01/02	03	01	00	10		
TK-SERIES																								TK-SERIES
TK75 2018															✓		✓							TK75 2018
TK72R																								TK72R
TK65R																								TK65R
TK47																								TK47
TK47UE																								TK47UE
TK35 2018																								TK35 2018
TK35UE 2018																								TK35UE 2018
TK32																								TK32
TK25IR		✓				✓				✓										✓	✓	✓	✓	TK25IR
TK25R&B		✓				✓				✓										✓	✓	✓	✓	TK25R&B
TK25Red		✓				✓				✓										✓	✓	✓	✓	TK25Red
TK20R										✓														TK20R
TK16										✓														TK16
TK15UE										✓														TK15UE
TK09										✓														TK09
PD-SERIES																								PD-SERIES
PD40R										✓														PD40R
PD35 TAC		✓				✓				✓														PD35 TAC
PD35 V2.0		✓				✓				✓														PD35 V2.0
PD32						✓				✓														PD32
PD25																								PD25
LD-SERIES																								LD-SERIES
LD75C																								LD75C
LD41																								LD41
LD22	✓					✓																		LD22
LD12	✓					✓																		LD12
LD09																								LD09
LD02																								LD02
E-SERIES																								E-SERIES
E35UE						✓				✓					✓		✓				✓	✓		E35UE
E25UE		✓				✓				✓														E25UE
E20		✓				✓				✓														E20
E15																								E15
E12																								E12
E05																								E05
E01																								E01
MC-SERIES																								MC-SERIES
MC11																								MC11
FD-SERIES																								FD-SERIES
FD65																								FD65
FD45																								FD45
FD41																								FD41
FD30		✓				✓				✓														FD30
FD20		✓				✓				✓														FD20
RC-SERIES																								RC-SERIES
RC40																								RC40

MODEL	Filter Adapter				Diffuser Tip			Traffic Wand			Battery						Remote Switch		Rail Mount		Bike Mount	MODEL		
	AOF				AOD			AOT			ARB						AER		ALG		ALB			
	S	S+	M	L	S	M	L	S	M	L	L14 14500	L14/USB 14500	L16 16340	L2 18650	L18 18650	L18/USB 18650	L4 26650	01/02	03	01	00	10		
RC20										✓														RC20
RC11		✓								✓											✓	✓	✓	RC11
RC09														✓										RC09
RC05																								RC05
UC52																								UC52
UC35		✓								✓											✓	✓	✓	UC35
UC30		✓								✓											✓	✓	✓	UC30
UC09																								UC09
UC02																								UC02
UC02SS																								UC02SS
UC01																								UC01
SD-SERIES																								SD-SERIES
SD20																								SD20
SD11																						✓		SD11
SE-SERIES																								SE-SERIES
SE10																								SE10
HP-SERIES																								HP-SERIES
HP30R																								HP30R
HP25R																								HP25R
HP15UE																								HP15UE
HM-SERIES																								HM-SERIES
HM50R																								

NOTE:
* Only for ON/OFF operation.
** Press down the anode side when taking out the battery in case the battery's anode stuck in the battery holder.

MODEL	LED	Max output	Max runtime	Brightness level	IP rating	Dimension	Weight	Battery	MODEL
TK-SERIES									TK-SERIES
Tk75 2018	Cree XHP35 HI	5100 lumens	95h	6 output levels	IP68	188×53×86mm	630g	4*18650	TK75 2018
TK72R	XHP70	9000 lumens	88h	Stepless regulation	IP68	156×64×50.5mm	420g	14000mAh rechargeable battery pack	TK72R
TK65R	Cree XHP70	3200 lumens	113h	5 output levels	IP68	270.5×61.5×36.5mm	418g	10000mAh rechargeable battery pack	TK65R
TK47	Cree XHP35 HI	1300 lumens	220h	6 output levels	IP68	266.2×61.5×28.6mm	376g	2*18650	TK47
TK47UE	Cree XHP70	3200 lumens	170h	7 output levels	IP68	266.2×61.5×28.6mm	365g	2*18650	TK47UE
TK35 2018	Cree XHP35 HI(Neutral white)	1300 lumens	235h	5 output levels	IP68	159.5×43×48mm	271g	2*18650	TK35 2018
TK35UE 2018	Cree XHP 70	3200 lumens	152h	6 output levels	IP68	164.5×48×43mm	286g	2*18650	TK35UE 2018
TK32	Cree XP-L HI V3	1000 lumens	170h	8 output levels	IP68	159x25x52mm	175g	2*CR123A/1*18650	TK32
TK25 IR	Cree XP-G2 S3 LED's	1000 lumens	110h	6 output levels	IP68	142.6x25.4x40mm	175g	2*CR123A/1*18650	TK25 IR
TK25 R&B	Cree XP-G2 S3 LED's&XP-E2 LED	1000 lumens	110h	7 output levels	IP68	142.6x25.4x40mm	156.5g	2*CR123A/1*18650	TK25 R&B
TK25 Red	Cree XP-G2 S3 LED's&XP-E2 LED	1000 lumens	110h	7 output levels	IP68	142.6x25.4x40mm	156.5g	2*CR123A/1*18650	TK25 Red
TK20R	Cree XP-L HI V3	1000 lumens	160h	4 output levels	IP68	151.5×25×34mm	141g	2*CR123A/1*18650	TK20R
TK16	Cree XM-L2 U2	1000 lumens	150h	4 output levels	IP68	140×25×34mm	122g	2*CR123A/1*18650	TK16
TK15UE	Cree XPL HI V3	1000 lumens	135h	4 output levels	IP68	142.5x 25.4x34mm	141g	2*CR123A/1*18650	TK15UE
TK09	Cree XP-L HI	900 lumens	37h	3 output levels	IP68	130×25.4×34mm	105g	2*CR123A/1*18650	TK09
PD-SERIES									PD-SERIES
PD40R	Cree XHP70	3000 lumens	55h	5 output levels	IP68	138.5×34×30mm	126g	26650 rechargeable power battery	PD40R
PD35 TAC	Cree XP-L V5	1000 lumens	140h	5 output levels	IP68	137×25.4mm	89g	2*CR123A/1*18650	PD35 TAC
PD35 V2.0	Cree XP-L HI	1000 lumens	430h	5 output levels	IP68	138×23x25.4mm	88g	2*CR123A/1*18650	PD35 V2.0
PD32	Cree XP-L HI	900 lumens	240h	5 output levels	IP68	129.5×22.6×24mm	77g	2*CR123A/1*18650	PD32
PD25	Cree XP-L V5	550 lumens	100h	4 output levels	IP68	93×21.5mm	47g	1*16340/1*CR123A	PD25
LD-SERIES									LD-SERIES
LD75C	Cree XM-L2 U2 & XM-L color	4200 lumens	175h	9 output levels	IP68	158×52×74mm	430g	4*18650/8*CR123A	LD75C
LD41	Cree XM-L2 U2	960 lumens	200h	4 output levels	IP68	175×40mm	190g	4*AA	LD41
LD22	Cree XP-G2 R5	300 lumens	100h	4 output levels	IP68	155×215mm	72g	2*AA	LD22
LD12	Cree XP-G2 R5 (Neutral white)	320 lumens	60h	4 output levels	IP68	102.5×21.5×20.5mm	56g	1*14500/1*AA	LD12
LD09	Cree XP-E2 R3	220 lumens	58h	3 output levels	IP68	94×19mm	35g	1*14500/1*AA	LD09
LD02	Cree XP-E2	100 lumens	15h	3 output levels	IP68	76×15mm	16g	1*AAA	LD02
E-SERIES									E-SERIES
E35UE	Cree XM-L2 U2	1000 lumens	150小时	5 output levels	IP68	122×24mm	72g	2*CR123A/1*18650	E35UE
E25UE	Cree XP-L V5	1000 lumens	100小时	5 output levels	IP68	161×19.6×25.4mm	87g	2*14500/2*AA	E25UE
E20	Cree XP-E2	265 lumens	75小时	4 output levels	IP68	154×21×25.4mm	90g	2*AA	E20
E15	Cree XP-G2 R5	450 lumens	72小时	4 output levels	IP68	64.8×19×22mm	29g	1*16340/1*CR123A	E15
E12	Cree XP-E	130 lumens	36小时	3 output levels	IP68	90×19mm	28.5g	1*AA	E12
E05	Cree XP-E2	85 lumens	15小时	3 output levels	IP68	66.5×15mm	12.5g	1*AAA	E05
E01	Nichia	13 lumens	16小时30分	1 output levels	IP68	71×14.2mm	14g	1*AAA	E01

MODEL	LED	Max output	Max runtime	Brightness level	IP rating	Dimension	Weight	Battery	MODEL
MC-SERIES									MC-SERIES
MC11	Cree XP-G2 R5	155 lumens	100h	3 output levels	IP68	99×21.5×25mm	64.8g	1*AA	MC11
FD-SERIES									FD-SERIES
FD65	Cree XHP35 HI LED(Neutral white)	3800 lumens	86h	5 output levels	IP68	152.5×50.5×61mm	431g	4*18650	FD65
FD45	Cree XP-L HI (Neutral white)	900 lumens	160h	5 output levels	IP68	121.2×39×40mm	208g	4*AA	FD45
FD41	Cree XP-L HI	900 lumens	150h	4 output levels	IP68	146×25.4×40mm	160g	2*CR123A/1*18650	FD41
FD30	Cree XP-L HI	900 lumens	170h	5 output levels	IP68	140.5×23×25.4mm	96g	2*CR123A/1*18650	FD30
FD20	Cree XP-G2 S3 LED	350 lumens	80h	4 output levels	IP68	153.2×20×25.4mm	87g	2*AA	FD20
SE-SERIES									SE-SERIES
SE10	Cree XP-E2 R3 LED	100 lumens	2h50min	1 output levels	IP68	177.5×53×51mm	164g	3*AA	SE10
RC/UC-SERIES									RC/UC-SERIES
RC40	Cree XM-L2 U2	6000 lumens	125h	5 output levels	IP68	272×52×108mm	1234g	7800mAh/7.4v rechargeable battery	RC40
RC20	Cree XM-L2 U2	1000 lumens	120h	4 output levels	IP68	161×25.4×40mm	205g	2600mAh/3.7v rechargeable battery	RC20
RC11	Cree XM-L2 U2	1000 lumens	150h	5 output levels	IP68	115.5×23×25.4mm	69g	1*18650/2*CR123A	RC11
RC09	Cree XM-L2 U2	550 lumens	56h	4 output levels	IP68	72×21.5mm	45g	1*16340/1*CR123A	RC09
RC05	Cree XP-G2 R5	300 lumens	40h	4 output levels	IP68	94x19mm	36.8g	1*14500/1*AA	RC05
UC52	CREE XHP70 LED	3000 lumens	80h	5 output levels	IP68	153.5x42x25.9mm	276g	Built-in 7000mAh Li-ion battery	UC52
UC35	Cree XM-L2 U2	960 lumens	150h	5 output levels	IP68	150×25.4mm	99g	1*18650/2*CR123A	UC35
UC30	Cree XP-L HI	1000 lumens	150h	5 output levels	IP68	130×25.4x23.4mm	77g	1*18650/2*CR123A	UC30
UC09	Cree XP-G3 neutral white LED	500 lumens	150h	6 output levels	IP68	70×19mm	39g	1*16340/1*CR123A	UC09
UC02	Cree XP-G2 S2	130 lumens	3h50m	2 output levels	IP68	43.2×4mm	8g	1*10180	UC02
UC02SS	Cree XP-G2 S2	130 lumens	3h50m	2 output levels	IP68	43.2×14mm	18.4g	1*10180	UC02SS
UC01	Nichia	45 lumens	50h	3 output levels	IPX6	62×22.5×10mm	13g	Built-in Li-polymer battery	UC01
SD-SERIES									SD-SERIES
SD20	Cree XM-L2 U2 & Cree XQE Red	1000 lumens	7h30m	3 output levels	underwater 100m	208×26×40mm	245g	4*CR123A/2*18650	SD20
SD11	Cree XM-L2 U2 (Neutral white)	1000 lumens	3h40m	3 output levels	underwater 100m	138×26×34mm	132.5g	2*CR123A/1*18650	SD11
HP-SERIES									HP-SERIES
HP30R	Cree XM-L2&XP-G2 R5 LED(Neutral white)	1750 lumens	400h	8 output levels	IP66	77×52×34mm	285g	2*18650/4*CR123A	HP30R
HP25R	Cree XM-L2 U2 & XP-G2 R5	1000 lumens	150h	8 output levels	IP66	60×54×32.5mm	183.5g	1*18650/2*CR123A	HP25R
HP15UE	Cree XM-L2	900 lumens	170h	5 output levels	IP66	67.4 × 55.9 × 34.7mm	154.2g	4*AA	HP15UE

MODEL	LED	Max output	Max runtime	Brightness level	IP rating	Dimension	Weight	Battery	MODEL
HM-SERIES									HM-SERIES
HM50R	Cree XM-L2 U2	500 lumens	128h	4 output levels	IP68	67.5×33×28mm	63g	1*16340/1*CR123A	HM50R
HL60R	Cree XM-L2 U2 (Neutral white)	950 lumens	100h	6 output levels	IP68	87×46×51mm	121g	1*18650/2*CR123A	HL60R
HL55	Cree XM-L2 U2 (Neutral white)	900 lumens	100h	5 output levels	IP68	84 × 46 × 48mm	115g	2*CR123A/1*18650	HL55
HL23	Cree XP-G2 R5	150 lumens	110h	3 output levels	IP68	71 × 38.9 × 40mm	52g	1*AA	HL23
HL-SERIES									HL-SERIES
HL40R	Cree XP-G3 S4	600 lumens	200h	6 output levels	IP66	68 × 54 × 42mm	130g	Built-in 2000mAh Li-ion battery	HL40R
HL32R	Cree XP-G3 S3	600 lumens	200h	7 output levels	IP66	64 × 46 × 37.5mm	108g	Built-in 2000mAh Li-ion battery	HL32R
HL30 2018	Cree XP-G3 S3	300 lumens	200h	6 output levels	IP66	64 × 50 × 38mm	73.5g	2*AA	HL30 2018
HL26R	Cree XP-G2 R5	450 lumens	150h	6 output levels	IP66	65×44×37mm	86g	Built-in 1600mAh Li-ion battery	HL26R
HL16	Cree XP-E2 R3 LED(Neutral white)	70 lumens	85h	4 output levels	IP66	62 × 39.5 × 37mm	420g	1*AA	HL16
HL15	Cree XP-G2 R5 (Neutral white)	200 lumens	85h	5 output levels	IP67	63 × 41.5 × 35mm	60g	1*AAA	HL15
HL12R	Cree XP-G2 R5 (Neutral white)	400 lumens	110h	6 output levels	IP66	56 × 40 × 31.9mm	73.3g	Built-in1000mAh Li-polymer battery	HL12R
HL10	Philips LXZ2-5770	70 lumens	26h	3 output levels	IP68	70×25×23mm	33g	1*AAA	HL10
HL05	Imported Premium LED	8 lumens	260h	3 output levels	IP68	36 × 38 × 18mm	13g	2*CR2032	HL05
BIKE LIGHT									BIKE LIGHT
BC30R	Cree XM-L2 U2 (Neutral white)	1800 lumens	36h	5 output levels	IP66	114 × 50.5 × 31.8mm	420g	Built-in 5200mAh/3.7V rechargeable battery pack	BC30R
BC30	Cree XM-L2 T6	1800 lumens	20h	5 output levels	IP66	126.7 × 50 × 31.8mm	161g	2*18650/4*CR123A	BC30
BT30R	Cree XM-L2 T6 (Neutral white)	1800 lumens	22h35m	5 output levels	IP66	74×50.6×43.5mm	147g	2600mAh/7.4v rechargeable battery pack	BT30R
BC21R	Cree XM-L2 T6 (Neutral white)	880 lumens	15h50m	4 output levels	IP66	113×40.5×42mm	67g	1*18650/2*CR123A	BC21R
CAMP LANTERN									CAMP LANTERN
CP30R	Imported Premium Neutral White LED	400 lumens	130h	4 output levels	IP68	72 × 72 × 122.5mm	550g	Built-in 10000mAh Li-polymer battery	CP30R
CL30R	Imported Premium Neutral White LED	650 lumens	350h	5 output levels	IP67	93 × 93 × 136mm	412g	3*18650/6*CR123A	CL30R
CL25R	Imported Premium Neutral White LED	350 lumens	1000h	5 output levels	IP66	52 × 52 × 99mm	130g	1*18650/2*CR123A	CL25R
CL20R	Imported Premium Neutral White LED	300 lumens	160h	4 output levels	IP66	72.5 × 41× 51mm	90g	Built-in 1600mAh Li-ion battery	CL20R
CL09	Imported Premium Neutral White LED	200 lumens	150h	6 output levels	IP68	78.5×22mm	31.5g	1*16340/1*CR123A	CL09

CUSTOMER SERVICE

Fenix will exert every effort possible to make the service experience for our consumers as memorable, painless and cheerful as possible.

Fenix is concerned about your problems and difficulties when you are using our products, and we will try our best to provide excellent all-round service and support to you via our official website, Customer Service e-mail service and our survey questionnaire.

Fenix Product Warranty Terms

1.Service Principle

- a) Fenix provides easy, reliable, speedy service to all lights under our warranty.
- b) Dealers will be responsible for customers' complaints. Customers should contact the dealer/distributor from where they bought their Fenix lights, for warranty support, with their Fenixlight Limited's "Warranty Card", or a trade invoice or receipt. Fenix will provide our authorized dealers with the necessary technology and parts to service/repair our lights.

2.Warranty Details

- a) 15 days free replacement. Fenix will replace a new product if within 15 days of purchase, any manufacturing defect causes a malfunction during normal use, with the same model. If the model has been discontinued, customer will receive a model with similar specifications, or an improved model.
- b) 5 years free repairs. Fenix offers free repairs for lights for 5 years after date of purchase, if a problem occurs during normal use. Different warranty period for different products:

Type	Warranty
Flashlight, headlamp, bicycle light and camping lantern (including rechargeable lights but not with built-in battery)	5 years (rechargeable battery excluded)
Flashlight, headlamp, bike light and camping lantern (with built-in battery)	2 years (battery included)
Rechargeable battery, battery charger, bike mount and remote pressure switch	1 year

Fenix products and free offers, except for these listed above, are not covered under the Fenix product warranty.

- c) Limited Lifetime Warranty. For light repairs after expiration of the 5 year free repair warranty period, your light will be repaired but you will be charged for parts. The distributor will provide you with a quote before repairs.
- d) Extended Warranty Service. Fenix recommends that customers register their products with the serial number on the official Fenix website: www.fenixlight.com. Upon successful registration customers will receive an extra six (6) months warranty service.
- e) Warranty Certificate. Customers requesting aftersales service from Fenix distributors or dealers, should present their completed Fenix Warranty Card, purchase invoice or receipt. The distributor should then provide service to the customer/s, and Fenix will support backup for this service.
- f) The free warranty does not cover any damage or failure caused by:
 - i. Normal wear and tear;
 - ii. Rough operation;
 - iii. Battery leakage;
 - iv. Any defect or damage caused by improper operation, including but not limited to, operation which does not comply with the warranty or operator's manual specifications, e.g. if the operator's manual warns you against disassembling the flashlight head, doing so may damage the flashlight head and will void the warranty.
 - v. Any damage or defect caused by behavior beyond Fenix's control.

PHOTOS TAKEN

Cover: Brendon Wainwright
Back Cover: Scott Wesson & Jason Frankle
Inside Front Corner: Carlos Serrano
Inside Back Cover: Chaoyang Li
Illustration: Carlos Serrano
Brendon Wainwright
Samhu
Oldrich Oimer
Jeff Nass
Zorin Denu

g) To claim against your product warranty, contact our warranty service department with the following information:

- i. Name;
- ii. Type and model of product claimed for;
- iii. Serial number;
- iv. Age of the product;
- v. Description of the problem.

NOTE: This new policy is only valid for flashlights purchased since 01 January 2015.

For any problems/suggestions, please email our Customer Service Department:

service@fenixlight.com (Europe/America regions)

service_1@fenixlight.com (Asia/Oceania/Africa regions)

Tel: +86 400 8866 093 +86 755 2963 1193

The terms of the warranty is subject to change without prior notice. For the latest version, please refer to Fenix's website: www.fenixlight.com. Fenix reserves the rights of modification and final interpretation of these warranty terms.